Estimated energy costs

For use by the Queensland Competition Authority in its Final Determination of 2025-26 retail electricity tariffs

6 June 2025



About ACIL Allen

ACIL Allen is a leading independent economics, policy and strategy advisory firm, dedicated to helping clients solve complex issues.

Our purpose is to help clients make informed decisions about complex economic and public policy issues.

Our vision is to be Australia's most trusted economics, policy and strategy advisory firm. We are committed and passionate about providing rigorous independent advice that contributes to a better world.

Report to:

Queensland Competition Authority

Reliance and disclaimer The professional analysis and advice in this report has been prepared by ACIL Allen for the exclusive use of the party or parties to whom it is addressed (the addressee) and for the purposes specified in it. This report is supplied in good faith and reflects the knowledge, expertise and experience of the consultants involved. The report must not be published, quoted or disseminated to any other party without ACIL Allen's prior written consent. ACIL Allen accepts no responsibility whatsoever for any loss occasioned by any person acting or refraining from action as a result of reliance on the report, other than the addressee.

In conducting the analysis in this report ACIL Allen has endeavoured to use what it considers is the best information available at the date of publication, including information supplied by the addressee. ACIL Allen has relied upon the information provided by the addressee and has not sought to verify the accuracy of the information supplied. If the information is subsequently determined to be false, inaccurate or incomplete then it is possible that our observations and conclusions as expressed in this report may change. The passage of time, manifestation of latent conditions or impacts of future events may require further examination of the project and subsequent data analysis, and re-evaluation of the data, findings, observations and conclusions expressed in this report. Unless stated otherwise, ACIL Allen does not warrant the accuracy of any forecast or projection in the report. Although ACIL Allen exercises reasonable care when making forecasts or projections, factors in the process, such as future market behaviour, are inherently uncertain and cannot be forecast or projected reliably. ACIL Allen may from time to time utilise artificial intelligence (AI) tools in the performance of the services. ACIL Allen will not be liable to the addressee for loss consequential upon the use of AI tools.

This report does not constitute a personal recommendation of ACIL Allen or take into account the particular investment objectives, financial situations, or needs of the addressee in relation to any transaction that the addressee is contemplating. Investors should consider whether the content of this report is suitable for their particular circumstances and, if appropriate, seek their own professional advice and carry out any further necessary investigations before deciding whether or not to proceed with a transaction. ACIL Allen shall not be liable in respect of any claim arising out of the failure of a client investment to perform to the advantage of the client or to the advantage of the client to the degree suggested or assumed in any advice or forecast given by ACIL Allen.

© ACIL Allen 2025

ACIL Allen acknowledges Aboriginal and Torres Strait Islander peoples as the Traditional Custodians of the land and its waters. We pay our respects to Elders, past and present, and to the youth, for the future. We extend this to all Aboriginal and Torres Strait Islander peoples reading this report.



Goomup, by Jarni McGuire

Contents

1	Introduction			
2	Overview of approach			
	2.1 2.2 2.3	Introduction Components of the total energy cost estimates Methodology	6 6 7	
3	Resp	oonses to submissions to Draft Determination	32	
	3.1 3.2 3.3	Feed-in tariff methodology Solar PV exports and hedging costs LGCs	32 33 34	
4	Estir	nation of energy costs	35	
	4.1 4.2 4.3 4.4 4.5 4.6 4.7	Introduction Estimation of the Wholesale Energy Cost Estimation of renewable energy policy costs Estimation of other energy costs Estimation of energy losses Summary of estimated energy costs Estimation of rooftop PV feed-in tariff	35 39 51 54 59 61 62	

Figures

Figure 2.1	Components TEC	7
Figure 2.2	Illustrative example of hedging strategy, prices and costs	9
Figure 2.3	Penetration of interval meters for Residential and Small Business Customers	
	(aggregated)	11
Figure 2.4	Energex NSLP (MW) – July 2021 to June 2024	15
Figure 2.5	Estimating the WEC – market-based approach	21
Figure 2.6	Daily settlement prices and trade volume weighted prices (\$/MWh) for Q1 base)
	contracts in Queensland	24
Figure 2.7	Illustrative comparison of WEC estimation accuracy given market environment	25
Figure 2.8	Steps to estimate the cost of LRET	30
Figure 2.9	Steps to estimate the cost of SRES	31
Figure 4.1	Actual average time of day wholesale electricity spot price (\$/MWh, nominal) and	nd
	load profiles (MW, relative) – Queensland – 2018-19 to 2024-25	37
Figure 4.2	Actual annual average demand weighted price (\$/MWh, nominal) by profile and	
	regional time weighted average price (\$/MWh, nominal) – 2009-10 to 2023-24	38
Figure 4.3	Base, and Cap trade weighted average contract prices (\$/MWh, nominal) - 201	19-20
	to 2025-26	39
Figure 4.4	Time series of trade volume and price – ASX Energy base futures - Queenslan	d40
Figure 4.5	Time series of trade volume and price – ASX Energy \$300 cap futures -	
	Queensland	41
Figure 4.6	LNG netback prices	41

Contents

Figure 4.7	Comparison of upper one per cent of hourly regional system demands of 2025 simulated hourly demand sets with historical outcomes	-26 42
Figure 4.8	Comparison of upper one per cent of hourly loads and load factors of 2025-26	42
rigule 4.0	simulated hourly demand sets with historical outcomes – Energex NSLP and s	mall
	interval meter load	43
Figure 4.9	Comparison of various metrics of hourly prices from the 2025-26 simulations w	
rigure 4.0	historical outcomes – Queensland	44
Figure 4.10	Simulated annual DWP for NSLP and Interval meter demand as a percentage	TT
i iguio into	premium of annual TWP for 2025-26 compared with range of actual outcomes	in
	past years, and market share of utility scale solar (%)	45
Figure 4.11	Contract volumes used in hedge modelling of 594 simulations for 2025-26 for	10
	Energex NSLP + small interval meter import load	47
Figure 4.12	Annual WEC and DWP (\$/MWh, nominal) for the Energex NSLP + small interv	
	meter demands for the 594 simulations – 2025-26	48
Figure 4.13	Change in WEC and trade weighted contract prices (%) – 2019-20 to 2025-26	
Figure 4.14	LGC prices and trade volumes for 2025 and 2026 (\$/LGC, nominal)	52
Figure 4.15	Average time of day demand (MW) of the Energex NSLP and Energex small	
U	interval meter demand data – 2023-24	62
Figure 4.16	Average time of day demand (MW) of the Energex NSLP and Energex small	
·	interval meter demand data – 2023-24	64
Tables		
Table 2.1	Sources of load data	10
Table 2.2	Load profiles adopted for estimation of WEC by customer settlement class	12
Table 2.3	Overview of Reference case assumptions	17
Table 2.4	Near-term addition to supply	19
Table 3.1	Review of issues raised in submissions in response to Issues Paper	32
Table 4.1	Estimated contract prices (\$/MWh, nominal) - Queensland	39
Table 4.2	Estimated WEC (\$/MWh, nominal) for 2025-26 at the regional reference node	49
Table 4.3	Estimating the 2025 and 2026 RPP values	52
Table 4.4	Estimated cost of LRET – 2025-26	53
Table 4.5	Estimated cost of SRES – 2025-26	53
Table 4.6	Total renewable energy policy costs (\$/MWh, nominal) – 2025-26	53
Table 4.7 Table 4.8	NEM management fees (\$, nominal) – 2025-26	54 55
Table 4.0	Ancillary services (\$/MWh, nominal) – Queensland, 2025-26 AEMO prudential costs for Energex NSLP and small interval meter load – 2025	
1 able 4.5	ALIVIO prudentiai costs foi Energex NSEF and smail interval meter load – 2020	56
Table 4.10	AEMO prudential costs for Ergon NSLP and large interval meter load – 2025-2	
Table 4.11	Hedge Prudential funding costs by contract type – Queensland 2025-26	57
Table 4.12	Hedge Prudential funding costs for ENERGEX NSLP and small interval meter I	
	- 2025-26	57
Table 4.13	Hedge Prudential funding costs for ERGON NSLP and large interval meter load	
-	2025-26	58
Table 4.14	Total prudential costs (\$/MWh, nominal) – 2025-26	58
Table 4.15	Total of other costs (\$/MWh, nominal) – Energex – 2025-26	59
Table 4.16	Total of other costs (\$/MWh, nominal) – Ergon – 2025-26	59
Table 4.17	Estimated transmission and distribution losses	60
Table 4.18	Estimated TEC for 2025-26 (\$/MWh, nominal)	61

1 Introduction

ACIL Allen has been engaged by the Queensland Competition Authority (the QCA) to provide advice on the energy related costs likely to be incurred by a retailer to supply customers on notified retail prices for the 2025-26 regulatory period.

Retail prices generally consist of three components:

- network costs
- energy costs
- costs associated with retailing to end users.

ACIL Allen's engagement relates to the energy costs component only. In accordance with the Ministerial Delegation (the Delegation), and the Consultancy Terms of Reference (TOR) provided by the QCA, the methodology developed by ACIL Allen provides an estimate of energy costs to be incurred by a retailer to supply customers on notified prices for 2025-26.

ACIL Allen is required to provide cost estimates for:

- the net system load profiles (NSLPs) and interval meter profiles in the Energex and Ergon distribution areas
- the load control profiles for small customers in the Energex distribution area
- the load control profiles for large business customers in the Ergon distribution area
- time-varying wholesale energy costs for small customers in the Energex distribution area

This report provides the estimates of the energy costs for use by the QCA in its Final Determination.

The report is presented as follows:

- Chapter 2 summarises our methodology.
- Chapter 3 provides responses to submissions made by various stakeholders following the release of the QCA's *Regulated retail electricity prices in regional Queensland for 2025–26: Draft determination* (March 2025), where those submissions refer to the methodology used to estimate the cost of energy in regulated retail electricity prices.
- Chapter 4 summarises our derivation of the energy cost estimates.

2 Overview of approach

2.1 Introduction

In preparing advice on the estimated energy costs, ACIL Allen is required to have regard to the actual costs of making, producing, or supplying the goods or services which in this case are the customer retail services to be supplied to customers on notified prices for the tariff year 1 July 2025 to 30 June 2026.

2.2 Components of the total energy cost estimates

ACIL Allen is required to estimate the Total Energy Costs (TEC) component of the retail tariffs. Total Energy Costs comprise the following components (as shown in Figure 2.1):

- Wholesale energy costs (WEC) for various demand profiles
- Environmental Costs: costs of complying with state and federal government policies, including the Renewable Energy Target (RET).
- Other wholesale costs: including National Electricity Market (NEM) fees, ancillary services charges, Reliability and Emergency Reserve Trader (RERT) costs, AEMO direction costs, and costs of meeting prudential requirements. In addition, this determination will also account for the known costs associated with the market interventions due to the triggering of administered pricing and spot market suspension that occurred in the NEM in June 2022 that were not finalised at the time of the 2023-24 and 2024-25 Final Determinations.
- Energy losses incurred during the transmission and distribution of electricity to customers.

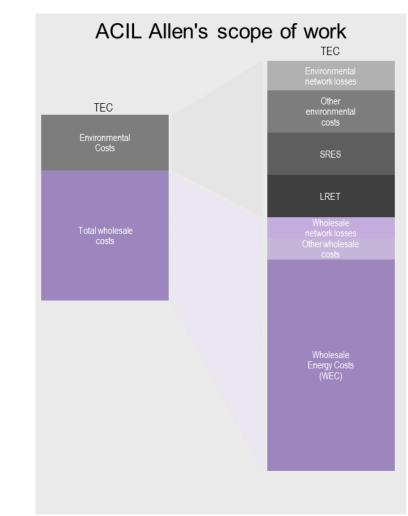


Figure 2.1 Components TEC

Source: ACIL Allen

2.3 Methodology

ACIL Allen's methodology follows the methodology used to provide advice to the QCA for the 2013-14 to 2024-25 determinations.

The ACIL Allen methodology estimates costs from a retailing perspective. This involves estimating the energy and environmental costs that an electricity retailer would be expected to incur in a given determination year. The methodology includes undertaking wholesale energy market simulations to estimate expected spot market costs and volatility, and the hedging of the spot market price risk by entering into electricity contracts with prices represented by the observable futures market data. Environmental and other energy costs are added to the wholesale energy costs and the total is then adjusted for network losses.

Estimating the WEC - market-based approach

Energy purchase costs are incurred by a retailer when purchasing energy from the NEM spot market to satisfy their retail load. However, given the volatile nature of wholesale electricity spot prices, which is an important and fundamental feature of an energy-only market (i.e. a market without a separate capacity

7

mechanism), and that retailers charge their customers based on fixed rate tariffs (for a given period), a prudent retailer is incentivised to hedge its exposure to the spot market.

Hedging can be achieved by a number of means – a retailer can own or underwrite a portfolio of generators (the gen-tailer model), enter into bilateral contracts directly with generators, purchase over the counter (OTC) contracts via a broker, or take positions on the futures market. Typically, a retailer will employ a number of these hedging approaches. In addition, a retailer may choose to leave a portion of their load exposed to the spot market.

At the core of the market-based approach is an assumed contracting strategy that an efficient retailer would use to manage its electricity market risks. Such risks and the strategy used to mitigate them are an important part of electricity retailing. The contracting strategy adopted generally assumes that the retailer is partly exposed to the wholesale spot market and partly protected by the procured contracts.

The methodology simulates the cost of hedging by building up a portfolio of hedges consisting of base and peak swap contracts, and cap contracts (and this is discussed in more detail below).

Conceptually, in a given half-hourly settlement period, the retailer:

- Pays AEMO the spot price multiplied by the demand.
- Pays the contract counterparty the difference between the swap contract strike price and the spot price, multiplied by the swap contract quantity. This is the case for the base swap contract regardless of time of day, and for the peak swap contract during the periods classified as peak. If the spot price is greater than the contract strike price than the counter party pays the retailer.
- Pays the contract counterparty the cap price multiplied by the cap contract quantity.
- If the spot price exceeds \$300/MWh, receives from the contract counter party the difference between the spot price and \$300, multiplied by the cap contract quantity.

Figure 2.2 shows an illustrative example of a hedging strategy for a given load across a 24-hour period.

In this example:

- The demand profile:
 - Varies between 400 MW and 1,300 MW.
 - Peaks between 6 pm and 10 pm, with a smaller morning peak between 9 am and 11 am.
- The hedging strategy:
 - Consists of 375 MW of base swaps, 100 MW of peak period swaps, and 700 MW of caps.
 - Means that demand exceeds the total of the contract cover between 7 pm and 10 pm by about 100 MW. Hence during these periods, the retailer is exposed to the spot price for 100 MW of the demand, and the remaining demand is covered by the hedges.
 - Demand is less than the hedging strategy for all other hours. Hence, during these periods the
 retailer in effect sells the excess hedge cover back to the market at the going spot price (and if the
 spot price is less than the contract price this represents a net cost to the retailer, and vice versa).

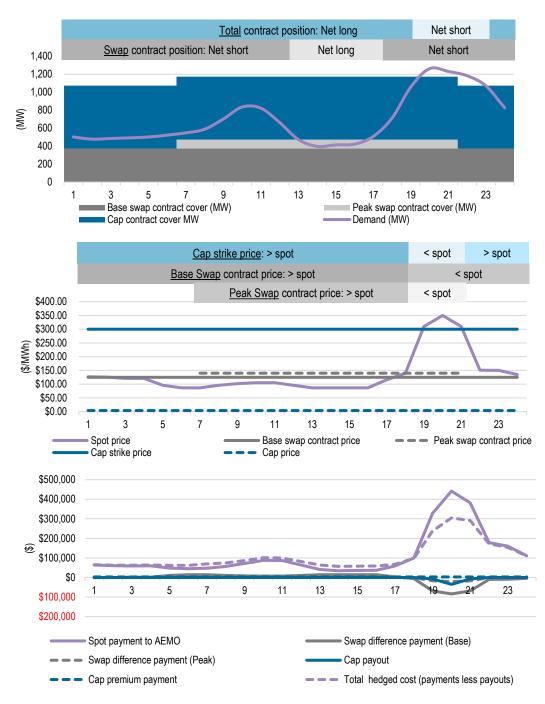


Figure 2.2 Illustrative example of hedging strategy, prices and costs

With this in mind, the WEC for a given demand profile for a given year is therefore generally a function of four components, the:

- 1. demand profile
- 2. wholesale electricity spot prices
- 3. forward contract prices
- 4. hedging strategy.

Source: ACIL Allen

Use of financial derivatives in estimating the WEC

As discussed above, retailers purchase electricity in the NEM at the spot price and use a number of strategies to manage their risk or exposure to the spot market. Market-based approaches adopted by regulators for estimating the WEC make use of financial derivative data given that it is readily available and transparent. This is not to say regulators are of the view that retailers only use financial derivatives to manage risk – it simply reflects the availability and transparency of data.

Some retailers also use vertical integration and Power Purchase Agreements (PPAs) to manage their risk. However, the associated costs, terms and conditions of these approaches are not readily available in the public domain. Further, smaller retailers may not be in a position to use vertical integration or PPAs and hence rely solely on financial derivatives.

Additionally, the value of long-dated assets associated with vertical integration and PPAs is determined by conditions in the market at a given point in time. The price in a PPA or the annualised historical cost of generation reflects the long term value of the generation anticipated at the time of commitment when the investor was faced with a variety of uncertain futures. As a consequence, there are considerable difficulties in using the price of PPAs or the annualised historical cost of generation as a basis for estimating current hedging costs.

In essence, the methodology uses available and transparent financial derivative data as a proxy for the range of other hedging instruments adopted by retailers.

Use of demand profiles in estimating the WEC

Our scope of work requires the estimation of the WEC for residential and small business demand in each distribution zone.

The following load profiles are required for the given determination year:

- system load for each region of the NEM (that is, the load to be satisfied by scheduled and semischeduled generation) – used to model the regional wholesale electricity spot prices
- Net System Load Profiles (NSLPs) for the Energex and Ergon distribution networks
- interval meter load data for residential and small business customers in the Energex distribution network
- interval meter load data for large business customers in the Ergon distribution network
- controlled load profiles (CLPs) for small customers in the Energex distribution network
- CLPs for small business customers on a primary load control tariff in the Energex distribution network
- CLPs for large business customers in the Ergon distribution network.

Historical demand data is available from AEMO – as shown in Table 2.1.

Distribution Network	Load Type	Load Name	Source
NA	System Load	QLD1	MMS
Energex	NSLP	NSLP, ENERGEX	MSATS
Energex	Residential and small business customers on interval meters	Energex Residential < 100 MWh and Business < 100 MWh	QCA data request to AEMO
Ergon	NSLP	NSLP, ERGON	MSATS

Distribution Network	Load Type	Load Name	Source
Ergon	Large business customers on interval meters	Ergon Business >= 100 MWh	QCA data request to AEMO
Energex	CLP – small customers	QLDEGXCL31, ENERGEX	MSATS
Energex	CLP – small customers	QLDEGXCL33, ENERGEX	MSATS
Energex	CLP – small business primary load control tariff	2019-20 Ergon Energy Agricultural Tariff Trial	Energy Queensland
Ergon	CLP – large business primary and secondary load control tariffs	QLDEGXCL33, ENERGEX	MSATS

Source: AEMO

Use of interval meter data for residential and small business customers

Since the Power of Choice reforms in 2017, new rooftop solar PV installations require the replacement of an existing accumulation meter with a new interval meter. In previous determinations the NSLP has been used as the representative load profile for residential and small business customers because the majority (about 90 per cent in 2020, and 80 per cent in 2021) of residential and small business customers were on accumulation (or basic) meters. And those customers with interval (or smart) meters were in the minority. However, ACIL Allen estimates the penetration of interval meters in 2023-24 increased to about 40-50 per cent.

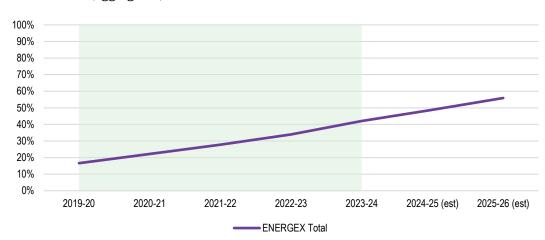


Figure 2.3 Penetration of interval meters for Residential and Small Business Customers (aggregated)

Source: ACIL Allen analysis of AEMO data

With the likely continued roll out of interval meters due to, in part by retailers responding to various market incentives, the end-of-life replacement of older accumulation meters, and due to the AEMC's

recommendation of a target of 100 per cent uptake of smart meters by 2030, it is probable that customers on interval meters will be the majority in the next 1 to 2 years.

In this determination, we have used a combination of the NSLP and interval meter data in our estimation of the WEC. The use of interval meter data improves the estimation of the cost of supplying energy to small customers because the interval meter data in addition to the NSLP better reflects the shape of small customers' load imported from the grid.

As with the 2024-25 determination, for the 2025-26 determination we have been able to exclude the PV export carve out from the customer demand profile when estimating the WEC by using more recent post-5MS interval meter load data supplied by AEMO, and have aggregated the NSLP and interval meter data for small customers. This is appropriate because the tariffs represent a price for consumption drawn from the grid (imports), not for PV exports and not for imports net of exports.

It is worth noting that the wholesale spot price modelling of the NEM continues to include the PV export carve out in the regional demand profiles (that is, the demand to be satisfied by scheduled and semi-scheduled generation), since this what occurs in the NEM.

Customer groups and load profiles used

Table 2.2 summarises which load profiles are adopted for the estimation of the WEC for each customer settlement class (or customer group).

Customer settlement class	Load profile used in WEC estimation
Energex - Residential and small business	Energex NSLP + Residential and small business interval meter load
Energex - Controlled load tariff 9000 (31)	QLDEGXCL31
Energex - Controlled load tariff 9100 (33)	QLDEGXCL33
Energex - Unmetered supply	Energex NSLP + Residential and small business interval meter load
Ergon Energy - CAC and ICC	Ergon large business interval meter load
Ergon Energy - SAC demand and street lighting	Ergon NSLP + Large business interval meter load
Energex – Small business primary load control tariff	2019-20 Ergon Energy Agricultural Tariff Trial load
Ergon – Large business primary and secondary load control tariffs	QLDEGXCL33

 Table 2.2
 Load profiles adopted for estimation of WEC by customer settlement class

Source: ACIL Allen

Key steps to estimating the WEC

The key steps to estimating the WEC for a given load and year are:

1. Forecast the hourly demand profile – generally as a function of the underlying demand forecast as published by the Australian Energy Market Operator (AEMO), and accounting for further uptake of rooftop solar PV (including PV exports which are deducted from the regional demand profiles for the spot price modelling). A stochastic demand and renewable energy resource model to develop 54 weather influenced annual simulations of hourly demand and renewable energy resource traces which are developed so as to maintain the appropriate correlation between the various regional and NSLP/CLP/interval meter demands, and various renewable energy zone resources.

- 2. Use a stochastic availability model to develop 11 annual simulations of hourly thermal power station availability.
- Forecast hourly wholesale electricity spot prices by using ACIL Allen's proprietary wholesale energy market model, *PowerMark. PowerMark* produces 594 (i.e. 54 by 11) simulations of hourly spot prices of the NEM using the stochastic regional demand and renewable energy resource traces and power station availabilities as inputs.
- 4. Estimate the forward contract price using ASX Energy contract price data, verified with broker data. The book build is based on the observed trade volumes and the price estimate is equal to the trade volume weighted average price.
- 5. Adopt an assumed hedging strategy the hedging strategy represents a strategy that a retailer would undertake to hedge against risk in the spot price in a given year. It is generally assumed that a retailer's risk management strategy would result in contracts being entered into progressively over a two- or three-year period, resulting in a mix (or portfolio) of base (or flat), peak and cap contracts.
- 6. Calculate the spot and contracting cost for each hour and aggregate for each of the 594 simulations for a given simulation, for each hour calculate the spot purchase cost, contract purchase costs, and different payments, and then aggregate to get an annual cost which is divided by the annual load to get a price in \$/MWh terms.

The above steps produce a distribution of estimated WECs which vary due to variations in demand, and spot prices. Wholesale electricity spot prices will vary depending on the actual demand (which will vary based on weather conditions), renewable generator resource (which also varies with weather outcomes), and availability of thermal power stations. It is this variability, and associated risk, that incentivises retailers to enter into hedging arrangements. However, this variability also changes the values of the spot purchase costs and difference payments incurred by a retailer (even though the contract prices and strategy are fixed).

The distribution of outcomes produced by the above approach is then analysed to provide a risk assessed estimate of the WEC. ACIL Allen adopts the 95th percentile WEC from the distribution of WECs as the final estimate. In practice, the distribution of WECs from the simulations exhibits a relatively narrow spread when compared to estimates based on the load being 100 per cent exposed to the spot market, which is to be expected since they are hedged values. Choosing the 95th percentile reduces the risk of understating the true WEC, since only five per cent of WEC estimates exceed this value.

Choosing the appropriate hedging strategy

As mentioned above, multiple hedging strategies are tested by varying the mix of base/cap contracts for each quarter. This is done by running the hedge model for a large number¹ of simulations for each strategy and analysing the resulting distribution of WECs for each given strategy – and in particular, keeping note of the spread in WEC for each strategy. We select a strategy that is robust and plausible for each load profile, and minimises the spread in WEC, noting that:

- some strategies may be effective in one year but not in others
- in practice, retailers do not necessarily make substantial changes to the strategy from one year to the next
- our approach is a simplification of the real world, and hence we are mindful not to over-engineer the approach and give a false sense of precision.

The hedging strategy is not necessarily varied for every determination year – it tends to change when there is a sufficient change in either the shape of the load profile (for example, due to the continued uptake of rooftop PV) or a change in the relationship between contract prices for the different contract products (for

¹ When testing the different strategies, we do not run the full set of 594 simulations as this is time prohibitive. However, we run the full set of 594 simulations once the strategy has been chosen.

example, in some years base contract prices increase much more than cap contract prices, which can influence the strategy).

Demand-side settings

The seasonal peak demand and annual energy forecasts for the regional demand profiles are referenced to the central scenario from the latest available Electricity Statement of Opportunities (ESOO) published by AEMO and take into account past trends and relationships between the NSLPs and interval meter loads and the corresponding regional demand.

It is usual practice to use a number of years of historical load data together with the P10, P50 and P90 seasonal peak load, and energy forecasts from the AEMO neutral scenario to produce multiple simulated representations of the hourly load profile for the given determination year using a Monte Carlo analysis. These multiple simulations include a mix of mild and extreme representations of demand – reflecting different annual weather conditions (such as mild, normal and hot summers).

The key steps in developing the demand profiles are:

- The half-hourly demand profiles of the past two² years are obtained. The profiles are adjusted by 'adding' back the estimated rooftop PV generation for the system demand and each NSLP and interval meter demand profile (based on the amount of rooftop PV in each distribution network).
- A stochastic demand model is used to develop about 54 weather influenced simulations of hourly demand traces for the NSLPs and interval meter demands, each regional demand, and each renewable resource importantly maintaining the correlation between each of these variables. The approach takes the past three years of actual demand data, as well as the past 54 years of weather data and uses a matching algorithm to produce 54 sets of weather-related demand profiles of 17,520 half-hourly loads. This approach does not rely on attempting to develop a statistical relationship between weather outcomes and demand instead, it accepts there is a relationship and uses a matching algorithm to find the closest matching weather outcomes for a given day across the entire NEM from the past three years to represent a given day in the past.
- The set of 54 simulations of regional system demands is then grown to the AEMO demand forecast using a non-linear transformation so that the average annual energy across the 54 simulations equals the energy forecast, and the distribution of annual seasonal peak loads across the 54 simulations generally matches the distribution of peak loads inferred by the P10, P50 and P90 seasonal peaks from the AEMO demand forecast.
- A relationship between the variation in the NSLPs and interval meter demand profiles, and the corresponding regional demand from the past two years is developed to measure the change in NSLP and interval meter load as a function of the change in regional demand. This relationship is then applied to produce 54 simulations of weather related NSLP and interval meter demand profiles of 17,520 half-hourly demands which are appropriately correlated with system demand, but also exhibit an appropriate level of variation in the NSLP and interval meter demand across the 54 simulations.
- The projected uptake of rooftop PV for the determination year is obtained (using our internal rooftop PV uptake model).
- The half-hourly rooftop PV output profile is then grown to the forecast uptake and its share is deducted from the system demand and NSLPs, and the share of the PV output profile net of exports is deducted from the interval meter demands.

² Normally we use two to three years of data, however for this determination, we have used data spanning 1 October 2023 to 30 September 2024 as this allows the analysis to exclude the initial temporary artificial step up in NSLPs in Queensland and New South Wales.

AEMO adjustment to the Energex NSLP demand data used in the analysis

An important input to estimate the WEC is the demand trace for small customers. The shape of the demand trace and its variability, together with spot price levels, shape and volatility, influences how a retailer manages risk for this segment of the market.

Therefore, an appropriate representation of the demand trace of small customers to be served by retailers in 2025-26 is required to estimate the WEC as accurately as possible. The more accurate the demand trace representation for 2025-26, the more accurate the WEC estimate.

Typically, the methodology uses the past two to three years of actual NSLP demand trace data to generate multiple representations of the demand trace for the given determination year. Adopting this usual approach would mean using actual NSLP data spanning 1 July 2021 to 30 June 2024.

However, as shown in Figure 2.4 and noted in the 2024-25 determination, we observe that between 1 October 2021 and 30 September 2023 there was a step change in the NSLP demand trace for Energex.



Figure 2.4 Energex NSLP (MW) – July 2021 to June 2024

The cause for this step change was not due to a sudden change in consumer behaviour or consumption patterns. The cause was AEMO making an initial adjustment to manage an issue relating to negative demand values coinciding with the commencement of 5MS. AEMO's adjustment resulted in an "artificial uplift" to the Energex NSLP traces during this period.

Source: ACIL Allen analysis of AEMO data

This artificial uplift would have impacted how AEMO settled the NSLP with retailers during the period 1 October 2021 and 30 September 2023. However, we observe, and AEMO notes, that this artificial uplift was temporary and ceased from 1 October 2023, from which point the adjustment approach was revised. We note there is no discernible change in the shape of the NSLP after 1 October 2023.

This means the artificial uplift will not impact retailers in 2025-26.

Therefore, we identify four options for developing a set of representative demand traces for 2025-26:

- Take the usual approach and use the actual NSLP data spanning 1 July 2021 to 30 June 2024. This
 would mean that the simulated demand traces for 2025-26 will include the temporary artificial uplift.
 Plainly this is inaccurate since the artificial uplift ceased from 1 October 2023 and will not be present in
 2025-26. Further, the temporary artificial uplift applied to the Energex NSLP only, and therefore
 continuing to include the uplift would result in 2025-26 WEC estimates for Energex inconsistent with
 those of the Ergon network.
- 2. Use older NSLP data prior to the temporary artificial uplift to represent the NSLP demand trace in 2024-25. This would mean using data from 1 July 2019 to 30 June 2021. This data is between 4 to 6 years old and runs the risk of not representing the trace for 2024-25 given the movement of small customers away from the NSLP due to the ramp up in the rollout of interval meters. It also means that the spot price modelling will be based on regional system demand trace data that is also 3 to 5 years old (recalling that to maintain internal consistency between the spot price modelling and hedge model is critical to use coincident NSLP and regional system demand traces from the same period).
- 3. Use the latest available NSLP data as per option 1, but remove the artificial uplift given it will not be present in 2025-26. This has the advantage of using the latest available data which will also allows for the pairing up with the latest available interval meter demand trace data, and also means the spot price modelling is based on the latest regional system demand traces.
- 4. Use data from 1 October 2023 to 30 September 2024, avoiding the need to remove the temporary uplift.

On balance, it is ACIL Allen's view that option 4 is the appropriate option to adopt for the determination. We note that for the 2024-25 determination we recommended option 3. This was because option 4 was not available at that time given the October 2023 to September 2024 data were not in existence.

Using 1 year of data could increase the risk of the data set containing less variability than that observed in a 3 year data set. ACIL Allen has analysed the variability in the demand, weather, and renewable energy resource outcomes between 1 October 2023 and 30 September 2024 and concludes there is sufficient variability in these compared with a longer dated data set.

Supply side settings

ACIL Allen maintains a Reference case projection of the NEM, which it updates each quarter in response to supply changes announced in the market in terms of new investment, retirements, fuel costs, and plant availability. In this analysis, for 2025-26 we use our December 2024 Reference case projection settings which, in the short term, with the exception of fuel prices, are closely aligned with AEMO's latest Integrated System Plan (ISP) and ESOO Step Change case. Table 2.3 summarises the key assumptions adopted in the Reference case for the spot price modelling pertinent for the 2025-26 period.

ACIL Allen incorporates changes to existing supply where companies have formally announced the changes – including, mothballing, closure and change in operating approach. Near term new entrants are included where the plants are deemed by ACIL Allen to be committed projects.

Table 2.3 Overview of Reference case assumptions

Assumption	Details				
 Macro-economic variables Exchange rate of AUD to USD of 0.70 AUD/USD. The brent crude oil price is assumed to converge from current levels to USD65/barrel by the mid-2020s and remain at term. International thermal coal prices are assumed to be about USD\$140/t in 2025-26. 					
Electricity demand	Underlying demand	Rooftop PV	Behind-the-meter BESS	Electric vehicles	
	 AEMO 2024 ISP Step Change scenario (energy and peak demand). 	ACIL Allen's in-house model of Rooftop PV uptake: NEM-wide Rooftop PV uptake is about 5% lower than AEMO's Step Change scenario forecast in 2025- 26, reflecting the recent observed slower growth in installations.	ACIL Allen's in-house model of behind-the-meter BESS uptake (linked to rooftop PV model): Modest uptake in 2025-26.	ACIL Allen's in-house model of electric vehicle uptakes: Modest impact on demand in 2025-26.	
Electricity supply (beyond new supply driven by	Committed projects Assumed new entry and closures				
state-based and federal schemes)	 Identified new entrant projects are included in the modelling where there is a high degree of certainty that these will go ahead (i.e., project has reached financial close) Committed or likely committed generator closures included where the closure has been announced by the participant (Torrens Island B in 2026). 				
	Where appropriate, existing and committed new investment is accounted for in the state based and federal schemes to avoid double counting				
Gas prices into gas-fired power stations	 The East Coast Gas Market (ECGM) is modelled by ACIL Allen's GasMark model, which produces projections of seasonal gas prices delivered into the NEM's gas fired generators. Gas prices for mid merit CCGTs are projected to be around \$9-\$15/GJ (summer – winter) Gas prices for peaking OCGTs are assumed to around \$16-\$26/GJ (summer – winter) 				
Coal prices into coal-fired power stations		derstanding of the cost of thermal coa posure to the international export mark	•	ons, based on existing contracts with	

Assumption	Details					
	New South Wales	Queensland	Victoria			
	The delivered marginal coal prices in NSW are assumed to be linked to export parity and therefore follow the assumed movement in	Most generators' fuel supply is not linked to export pricing. Marginal coal prices range from \$2 to \$7/GJ in	Coal mined for power generation in Victoria is unsuitable for export and hence not affected by fluctuations in export prices.			
		2025-26	Marginal coal prices range from \$0.50 to \$0.80/GJ in 2025-26.			
Marginal loss factors	Marginal loss factors ACIL Allen's projections of average annual marginal loss factors (MLF) by generator DUID, developed using commercial power flow sof latest calibration with AEMO's forecast has shown over 95% of connection point values deviating by no more than 0.02 from the latest A values for 2024-2025.					
Interconnectors	ISP committed and actionable projects included: – EnergyConnect (ramping up from December 2024, and fully commissioned by July 2027) – Heywood upgrade (July 2027)					

Source: ACIL Allen

New committed supply

Table 2.4 shows the near-term entrants that ACIL Allen considers committed projects and are therefore included in the Reference case. These projects are not yet registered in the market but are expected to come online in the near-term future.

Table 2.4 Near-term addition to supply

Region	Name	Generation	Capacity (MW)	First energy exports
		Technology		
NSW	Glanmire BESS	Battery	60	Q4 2026
NSW	Glanmire Solar Farm	Solar	60	Q4 2026
NSW	Goulburn River Solar Farm	Solar	450	Q3 2026
NSW1	Big Canberra Battery	Battery	250	Q1 2026
NSW1	Culcaim Solar Farm	Solar	350	Q1 2026
NSW1	Eraring Big Battery Stage 1	Battery	460	Q4 2025
NSW1	Liddell Battery	Battery	250	Q1 2025
NSW1	Limondale Battery	Battery	50	Q1 2026
NSW1	New England BESS Stage 1	Battery	50	Q4 2026
NSW1	New England BESS Stage 2	Battery	150	Q4 2026
NSW1	New England Solar Farm Stage 2	Solar	320	Q1 2026
NSW1	Orana BESS	Battery	415	Q4 2026
NSW1	Quom Park BESS	Battery	20	Q1 2026
NSW1	Quom Park Solar Farm	Solar	98	Q1 2026
NSW1	Smithfield BESS	Battery	65	Q4 2025
NSW1	Tilbuster Solar Farm	Solar	152	Q1 2025
NSW1	Uungula BESS	Battery	150	Q1 2026
NSW1	Uungula WF	Wind	414	Q1 2026
NSW1	Waratah Super Battery	Battery	850	Q1 2025
NSW1	Yanco Solar Farm	Solar	60	Q1 2025
QLD	Boulder Creek Wind Farm	Wind	228	Q4 2026
QLD	Hopeland Solar Farm	Solar	250	Q1 2026
QLD	Woolooga BESS	Battery	200	Q3 2026
QLD1	Aldoga Solar Farm	Solar	380	Q4 2025
QLD1	Ardranda Battery	Battery	200	Q1 2025
QLD1	Ardranda photovoltaic	Solar	175	Q1 2025
QLD1	Brendale BESS	Battery	205	Q3 2025
QLD1	Brigalow Peaking Power Plant	Natural gas	400	Q1 2026
QLD1	Broadsound BESS	Battery	180	Q3 2026
QLD1	Broadsound Solar Farm	Solar	296	Q3 2026
QLD1	Bundaberg Solar Farm	Solar	100	Q3 2025
QLD1	Greenbank BESS	Battery	200	Q1 2025
QLD1	Gunsynd Solar Farm	Solar	94	Q3 2025
QLD1	Herries Range Wind Farm	Wind	750	Q3 2026
QLD1	Kidston Storage Hydro	Pumped Hydro	250	Q1 2025
QLD1	Moah Creek Wind Farm	Wind	372	Q3 2025
QLD1	Mt Fox Battery	Battery	300	Q1 2025
QLD1	Supernode BESS	Battery	250	Q4 2025
QLD1	Swanbank BESS	Battery	250	Q3 2025
QLD1	Tarong West Wind Farm	Wind	500	Q1 2026
QLD1	Ulinda Park BESS	Battery	155	Q4 2025
QLD1	Western Downs Battery Stage 2	Battery	270	Q1 2026
SA	Goyder North Wind Farm Stage 1	Wind	300	Q3 2025
SA1	Clements Gap BESS	Battery	60	Q1 2026
SA1	Hallett BESS	Battery	50	Q4 2026

19


Region	Name	Generation Technology	Capacity (MW)	First energy exports
SA1	Solar River BESS	Battery	256	Q3 2026
SA1	Templers BESS	Battery	111	Q3 2025
VIC	Campbells Forest Solar Farm	Solar	205	Q3 2025
VIC	Elaine Solar Farm	Solar	125	Q1 2026
VIC	Kentbruck Wind Farm	Wind	600	Q1 2026
VIC	Mokoan Solar Farm	Solar	46	Q3 2025
VIC	Terang BESS	Battery	100	Q3 2026
VIC	West Mokoan Solar Farm	Solar	300	Q3 2026
VIC1	Derby Battery	Battery	85	Q1 2025
VIC1	Fulham Battery	Battery	80	Q1 2025
VIC1	Fulham Solar Farm	Solar	80	Q1 2025
VIC1	Gnarwarre Battery	Battery	250	Q1 2025
VIC1	Golden Plains Wind Farm	Wind	756	Q3 2025
VIC1	Horsham Battery	Battery	50	Q1 2025
VIC1	Horsham Solar Farm	Solar	118.8	Q1 2025
VIC1	Kiamal Battery	Battery	150	Q1 2025
VIC1	Kiamal Solar Farm Stage 2	Solar	150	Q2 2025
VIC1	Koorangie ESS	Battery	185	Q2 2025
VIC1	Mortlake Battery	Battery	300	Q1 2025
VIC1	Rangebank Battery	Battery	200	Q1 2025
VIC1	The Melbourne REH	Battery	600	Q4 2025

Source: ACIL Allen

Summary infographic of the approach to estimate the WEC

Figure 2.5 provides an illustrative infographic type summary of the data, inputs, and flow of the market-based approach to estimating the WEC.

Figure 2.5 Estimating the WEC – market-based approach

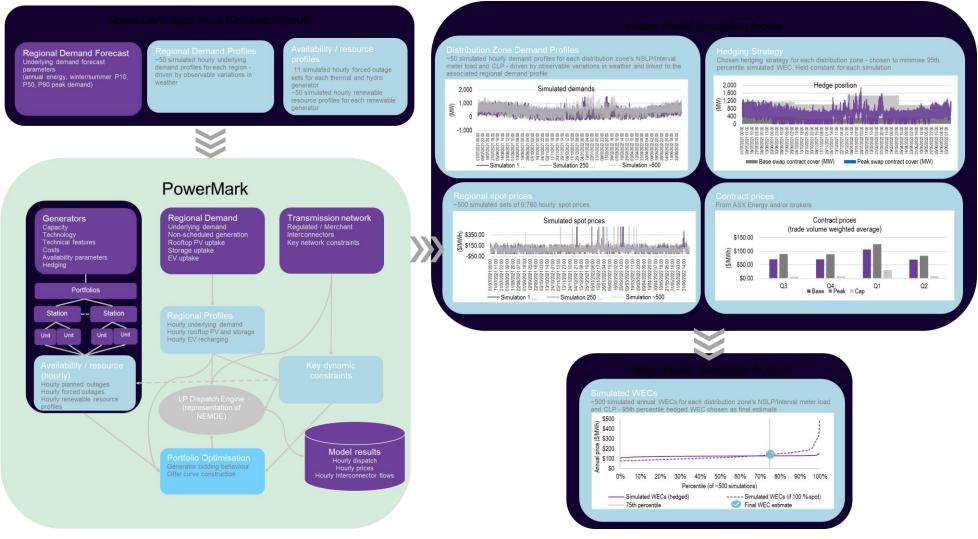

Source: ACIL Allen

Time varying WECs

The requirement to estimate time varying WECs for Energex small customers means the load profile is to be time sliced into period types. The WECs are to be based on the overall WEC for Energex small customers.

The QCA has provided ACIL Allen with the following specifications of the time slices for the period types for three different time varying WECs:

- Time varying WEC 1
 - Daylight: 9am 4pm
 - Evening Peak: 4pm 9pm
 - Night: 9pm 9am
- Time varying WEC 2³
 - Off-peak (Daylight): 11am -1pm
 - Peak (Evening): 5pm 8pm
 - Shoulder (Night): between the hours midnight to 11am, 1pm to 5pm and 8pm to midnight.
- Time varying WEC 3⁴
 - Off-peak (Daylight): 11am –4pm
 - Peak (Evening): 4pm 9pm
 - Shoulder (Night): between the hours midnight to 11am, 9pm to midnight.

The WEC for a given period type, p, is calculated as follows: WECp = DWPp * WECt / DWPt.

That is, the WECp equals the ratio WECt for the total (t) demand profile to the DWPt for the total demand profile, multiplied by the spot DWPp of the period type, p.

In effect, the method assumes the ratio of the WEC to DWP is the same for all period types. This method preserves the total WEC - that is, the sum product of the derived period type WECs and their energy, divided by the total energy of the profile equals the total demand profile WEC. And it is likely to provide the behavioural signals sought by this type of tariff – since the DWP during daylight hours will be less than the DWP for other period types.

WEC estimation accuracy

The estimated WEC for any determination will invariably be different to the actual WEC incurred. This will be a function of several factors, including the actual hedging strategy adopted by a retailer (noting different retailers may have different strategies) compared with the simplified hedging strategy adopted in the methodology, the actual load profiles, spot price and contract price outcomes.

Although we attempt to minimise the error of the estimate by undertaking a large number of simulations to account for variations in weather related demand, thermal plant availability, renewable energy resource, and spot price outcomes, the methodology does not attempt to predict the final trade weighted average contract price for each of the assumed contract products adopted in the hedging strategy. Instead, the methodology relies on contract data available at the time the Determination is made.

Contract prices are a key driver of the WEC estimate. In some years, contract prices may increase after the Final Determination is made, in other years they may decrease, and in some cases, they may remain relatively stable. Figure 2.6 provides three examples of this phenomenon for quarter one base contracts in

³ New for the 2025-26 determination.

⁴ New for the 2025-26 determination.

Queensland over the past four years. The graphs show the daily contract prices, the moving trade weighted average price, as well as the trade weighted average price at the time of the respective Final Determination.

After the date the 2020-21 Final Determination was made, Q1 2021 traded prices decreased consistently resulting in an actual trade weighted average price about \$8.50 lower than that used in the Final Determination. This is an example of a decreasing market price environment – resulting in an overestimate of the WEC (all other things equal).


After the date the 2021-22 Final Determination was made, Q1 2022 traded prices increased consistently resulting in an actual trade weighted average price about \$17.00 higher than that used in the Final Determination. This is an example of an increasing market price environment – resulting in an underestimate of the WEC (all other things equal).

After the date the 2022-23 Final Determination was made, Q1 2023 traded prices increased substantially resulting in an actual trade weighted average price about \$90.00 higher than that used in the Final Determination. This is another, and more extreme, example of an increasing market price environment – resulting in a substantial underestimate of the WEC (all other things equal).

After the date the 2023-24 Final Determination was made, Q1 2024 traded prices increased slightly and then decreased slightly resulting in an actual trade weighted average price very similar to that used in the Final Determination. This is an example of a relatively stable market price environment post Final Determination (at least in terms of the trade weighted average price) – resulting in a reasonably close estimate.

After the date the 2024-25 Final Determination was made, Q1 2025 traded prices increased slightly and have decreased over the past 3 months resulting in an actual trade weighted average price very similar to that used in the Final Determination. This is an example of a relatively stable market price environment post Final Determination (at least in terms of the trade weighted average price) – resulting in a reasonably close estimate.

Figure 2.6 Daily settlement prices and trade volume weighted prices (\$/MWh) for Q1 base contracts in Queensland

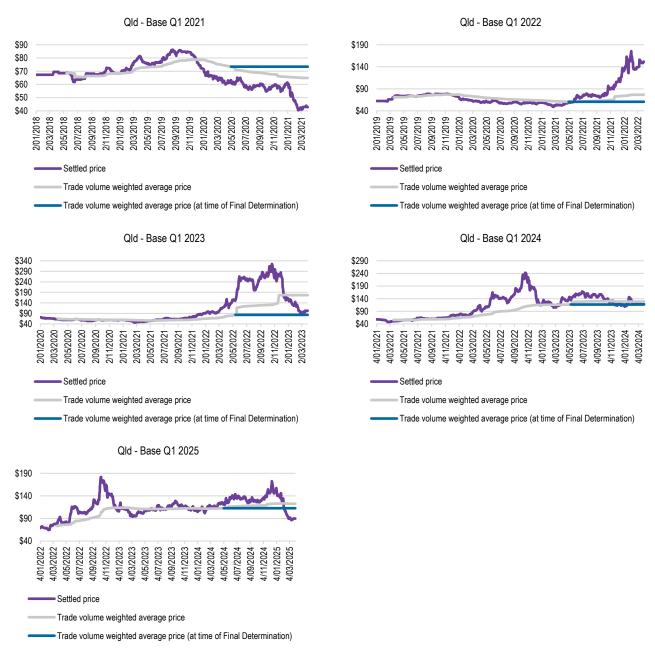

Source: ACIL Allen analysis of ASX Energy data

The graphs in Figure 2.6 demonstrate a number of important points about the WEC estimation methodology:

- It is much easier to estimate the WEC during periods of market and contract price stability.
- It is much more challenging to estimate the WEC during periods of increasing or decreasing contract prices.
- The error in the WEC estimate, due to contract price variation, is likely to be greater in an environment
 of increasing prices, than it is in an environment of decreasing prices. This is because of the skewed
 nature of wholesale electricity prices in the NEM prices can increase a lot more than they can


Estimated energy costs For use by the Queensland Competition Authority in its Final Determination of 2025-26 retail electricity tariffs


decrease – and demonstrates the risk faced by retailers. This is another reason to adopt a higher percentile of the simulated WECs.

 Adopting a bookbuild period from the date of the first trade, rather than artificially constraining it to a shorter time frame, means that the trade weighted average contract price has a greater chance of smoothing out temporary fluctuations in contract prices.

In some years contract prices will increase, and in others they will decrease after the Final Determination is made. It is unlikely that the market will enter into an extended period of seemingly ever-increasing or - decreasing prices – at some point, the market will respond accordingly with investment and/or retirement of capacity.

Hence, it is likely that over the long run, the market will follow some form of pattern of increasing, decreasing and stable price outcomes. With this in mind, the methodology may well result in a comparatively smooth WEC estimate trajectory – underestimating outcomes in an increasing price environment, and overestimating outcomes in a decreasing price environment – as illustrated in Figure 2.7.



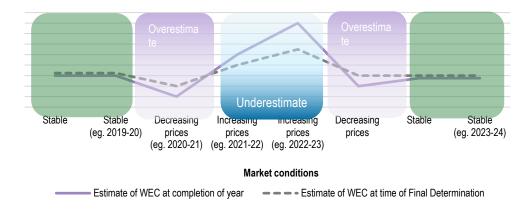

Source: ACIL Allen

Other wholesale costs

Market fees and ancillary services costs

Market fees and ancillary service costs are estimated based on data and policy documents published by AEMO.

NEM fees

NEM fees are payable by retailers to AEMO to cover operational expenditure, costs associated with full retail contestability (FRC), the Energy Consumers Australia (ECA), DER, IT upgrade costs associated with 5MS and the NEM 2025 Reform Program.

The approach for estimating market fees is to make use of AEMO's latest budget report. AEMO's 2025-26 draft budget report was released in April 2025 and adopted for the Final Determination.

Consistent with the 2024-25 Final Determination, we have not converted the weekly charges to a variable \$/MWh charge to better reflect the practices of retailers when billing customers. This adjustment to the approach also allows for a more accurate estimate of the NEM fees since no assumptions are made about the consumption volume of each customer. The variable NEM fees contained in AEMO's budget continue to be expressed in \$/MWh terms in this Determination.

Ancillary services charges

Ancillary services charges cover the costs of services used by AEMO to manage power system safety, security and reliability. AEMO recovers the costs of these services from market participants. These fees are published by AEMO on its website on a weekly basis.

The approach used for estimating ancillary services costs is to average the most recent 52 weeks of costs to recover ancillary services from customers, which is published on the AEMO website. This is done on a region-by-region basis.

Prudential costs

Prudential costs, for AEMO, as well as representing the capital used to meet prudential requirements to support hedging take into account:

- the AEMO assessed maximum credit limit (MCL)
- the future risk-weighted pool price
- participant specific risk adjustment factors
- AEMO published volatility factors
- futures market prudential obligation factors, including:
- the price scanning range (PSR)
- the intra month spread charge
- the spot isolation rate.

Prudential costs are calculated for each NSLP. The prudential costs for the NSLP are then used as a proxy for prudential costs for the controlled load profiles.

AEMO publishes volatility factors two years in advance. Similarly, ASX Energy publishes initial margin parameters two years in advance.

AEMO prudential costs

AEMO calculates a maximum credit limit for each counterparty in order to determine the requirement for any or a combination of:

- bank guarantees
- reallocation certificates
- prepayment of cash.

There is no fundamental requirement to reallocate prudential obligations – it is a retailer's choice to do so. Assuming no reallocation and no vertical integration (either owned generation or PPAs), a retailer is required to provide suitable guarantees to the AEMO assessed maximum credit limit (MCL) which is calculated as follows:

MCL = OSL + PML

Where for the Summer (December to March), Winter (April to August) and Shoulder (other months):

OSL = (Average daily load x Average future expected spot price x Participant Risk Adjustment Factor * OS Volatility factor x (GST + 1) x 19⁵ days

⁵ The AEMC in December 2024 released in Final Determination in relation to reducing the settlement cycle which in effect reduces the OSL period from 35 to 19 days (<u>https://www.aemc.gov.au/sites/default/files/2024-12/Shortening%20the%20settlement%20cycle%20-%20ERC0384%20-%20Final%20determination_final.pdf</u>)

PML = (Average daily load x Average future expected spot price x Participant Risk Adjustment Factor * PM Volatility factor x (GST + 1) x 7 days

The cost of funding a bank guarantee for the MCL associated with the single MWh is assumed to be a 2.5 percent annual charge for 36 days or 2.5%*(36/365) = 0.247 percent.

Hedge prudential costs

ACIL Allen relies on the futures market to determine hedging costs. The futures market includes prudential obligations by requiring entities to lodge initial margins (we assume cash) when contracts are purchased or sold. We understand that the cash that is lodged as an initial margin receives a money market related return which offsets some of the funding costs. The money market rate used in this analysis is 4.10 per cent. Additional margin calls may apply where contracts move unfavourably for the purchaser or seller. However, as these may be favourable or unfavourable, we have assumed that they average out over time.

We understand that the initial margin is set based on three parameters being:

- the price scanning range (PSR) expressed as a percentage of the contract face value and is set for each of the base, peak and cap contract types
- the intra monthly spread charge and is set for each of the base, peak and cap contract types
- the spot isolation rate and is set for each of the base, peak and cap contract types.

Using the annual average futures price and applying the above factors gives an average initial margin for each quarter. This is divided by the average hours in the given quarter. Then applying an assumed funding cost but adjusted for an assumed return on cash lodged with the clearing results in the prudential cost per MWh for each contract type.

Reliability and Emergency Reserve Trader (RERT)

Given the RERT is called upon under extreme circumstances only, ACIL Allen is of the opinion that it is difficult to project into the future. Although it may be possible to make use of previous costs of the RERT and relate these to AEMO's projection of USE in the ESOO, there is little data available at this point to take this approach.

Therefore, as with the ancillary services, we use the RERT costs as published by AEMO for the 12-month period prior to the Determination. ACIL Allen expresses the cost based on energy consumption, by taking the reported cost in dollar terms from AEMO for the given region and prorating the cost across all consumers in the region on a consumption basis.

Retailer Reliability Obligation

The Retailer Reliability Obligation (RRO) started on 1 July 2019 to help manage the risk of declining reliability of supply in response to the recent large amounts of investment in intermittent renewable projects coupled with recent and potential closures of thermal power stations.

If the RRO is triggered for a given quarter and region of the NEM, then retailers need to secure sufficient *qualifying contracts* to cover their share of a one-in-two-year peak demand.

The RRO is currently not triggered for 2025-26 in Queensland, and hence we are not required to account for the RRO in the wholesale costs for 2025-26. However, it is worth noting that this cost component should be included as part of the wholesale cost if the RRO is triggered in future determinations.

We think that entering into a mix of firm base and cap contracts satisfies the qualifying contract definition. As part of the current WEC estimation methodology, an algorithm is run to determine the optimal hedge cover for a given distribution zone for each quarter of the given determination period.

The total optimal cover is expressed as a percentage of the P50 annual peak demand for the given quarter – which is analogous to a one-in-two-year peak demand referred to in the RRO.

Our approach to account for the triggering of the RRO in the estimated WEC is:

- If the overall level of the optimal contract cover is less than 100 per cent of the P50 annual peak demand, then increase the overall level of contract cover to 100 per cent. This will result in an increase in the WEC value since the cost of the additional contracts will be included.
- If the overall level of the optimal contract cover is equal to or greater than 100 per cent of the P50 annual peak demand then no change is required, and hence the RRO has no impact on the WEC.

AEMO Direction costs

Under the National Electricity Rules (NER) AEMO can, if necessary, take action to maintain security and reliability of the power system. AEMO can achieve this by directing a participant to undertake an action – such as directing a generator to operate even though the spot price in the NEM is less than that generator's operating cash costs. In such instances, compensation may be payable to the participant. This compensation needs to be recovered from other market participants. It is worth noting that such directions issued by AEMO are separate to ancillary services.

There are two types of system security direction:

- 1. Energy direction the cost of which is recovered from customers
- 2. Other direction the cost of which is recovered from customers, generators, aggregators.

Details of the recovery methodology are provided in AEMO's NEM Direction Compensation Recovery paper published in 2015⁶.

In recent years, AEMO has directed selected gas fired generators in South Australia only to maintain a certain level of generation to ensure the security of the power system is maintained in that region – this is classified as an energy direction and hence its associated compensation is recovered from customers.

AEMO publishes the direction cost recovery data on a weekly basis. However, the files are prone to regular updates, as the required information to calculate the amount of compensation becomes available, and its apparent that there is a lag between the time the direction event occurs and final settlement.

AEMO also publish summaries of the costs associated with direction events in their Quarterly Energy Dynamics reports.

To arrive at the estimate of the AEMO Direction compensation costs, ACIL Allen takes the sum of the quarterly Direction costs by region for the most recent past four quarters, as presented in AEMO's latest available Quarterly Energy Dynamics Report (the latest report available at the time of undertaking our analysis for the Determination) and divided by the corresponding annual regional customer energy.

Costs associated with June 2022 NEM events

Between 12 and 23 June 2022 a series of events triggered administered pricing, spot market suspension and market interventions in the NEM consistent with the NER. As noted by AEMO in its Compensation Update published on 6 January 2023⁷, these events have associated compensation and contract payments, which under the NER are to be recovered from Market Customers (mainly electricity retailers). The costs will

⁶ <u>https://aemo.com.au/-/media/files/electricity/nem/market_notices_and_events/market_event_reports/2015/direction-recovery-reconciliation-file-v13.pdf</u>

⁷ https://aemo.com.au/-/media/files/electricity/nem/data/mms/2022/june-2022-nem-events-compensation-jan-6.pdf?la=en

be recovered in proportion to energy purchased in each relevant region. Hence these costs should be included in the Determination.

The AEMO Compensation Update published on 6 January 2023 summarises the costs, and groups them into the following categories:

- RERT payments
- Directions compensation
- Suspension pricing compensation
- Administered pricing compensation.

It is important to note that for this Determination, any RERT or Directions costs associated with the June 2022 events will be reported here and excluded from the usual RERT and Directions costs (to avoid double counting).

As with the 2023-24 and 2024-25 determinations, we continue to use AEMC's published compensation costs (in \$ terms) and allocate them to NEM regions in proportion to energy purchased in each relevant region (in \$/MWh terms), in accordance with the National Electricity Rules.

Compensation costs that were published prior to the 2023-24 Final Determination cut-off date of 10 May 2023 were included in the 2023-24 Final Determination energy costs. There were no compensation costs published in the lead up to the 2024-25 Final Determination, however some have been published in the lead up to the 2025-26 Final Determination and have been taken into account. Any outstanding compensation amounts published after the cut-off date will be included in future determinations.

Environmental costs

Large-scale Renewable Energy Target (LRET)

By 31 March each compliance year, the Clean Energy Regulator (CER) publishes the Renewable Power Percentage (RPP), which translates the aggregate LRET target into the number of Large-scale Generation Certificates (LGCs) that liable entities must purchase and acquit under the scheme.

The RPP is determined ex-ante by the CER and represents the relevant year's LRET target (in fixed GWh terms) as a percentage of the estimated volume of liable electricity consumption throughout Australia in that year.

The estimated cost of compliance with the LRET scheme is derived by multiplying the RPP and the determined LGC price to establish the cost per MWh of liable energy supplied to customers. Since the cost is expressed as a cost per MWh, it is applicable across all retail electricity tariffs.

Market-based approach

A market-based approach is used to determine the price of a LGC, which assumes that an efficient and prudent electricity retailer builds up LGC coverage prior to each compliance year.

This approach involves estimating the average LGC price using LGC forward prices for the two relevant calendar compliance years in the determination period. Specifically, for each calendar compliance year, the trade-weighted average of LGC forward prices since they commenced trading is calculated.

To estimate the costs to retailers of complying with the LRET for 2025-26, ACIL Allen uses the following elements:

 The average of the trade-weighted average of LGC forward prices for 2025 and 2026 from brokers TraditionAsia

- the Renewable Power Percentage (RPP) for 2025, published by the CER
- the estimated Renewable Power Percentage (RPP) for 2026⁸.

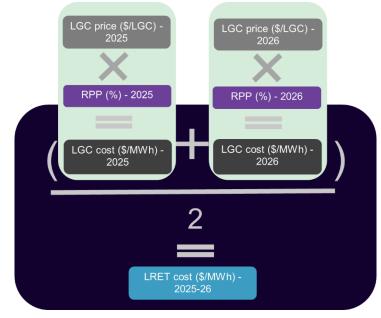


Figure 2.8 Steps to estimate the cost of LRET

Source: ACIL Allen

Small-scale Renewable Energy Scheme (SRES)

Similar to the LRET, by 31 March each compliance year, the CER publishes the binding Small-scale Technology Percentage (STP) for the year and non-binding STPs for the next two years.

The STP is determined ex-ante by the CER and represents the relevant year's projected supply of Smallscale Technology Certificates (STCs) as a percentage of the estimated volume of liable electricity consumption throughout Australia in that year.

The estimated cost of compliance with the SRES is derived by multiplying the estimated STP value.

To estimate the costs to retailers of complying with the SRES, ACIL Allen uses the following elements:

- the binding Small-scale Technology Percentage (STP) for 2025 as published by the CER
- an estimate of the STP value for 2026⁹
- CER clearing house price¹⁰ for 2025 and 2026 for Small-scale Technology Certificates (STCs) of \$40/MWh.

⁸ The estimated RPP value for 2026 is estimated using ACIL Allen's estimate of liable acquisitions and the CER-published mandated LRET target for 2025 and 2026.

⁹ The STP value for 2026 is estimated using estimates of STC creations and liable acquisitions in 2026, taking into consideration the CER's non-binding estimate.

¹⁰ Although there is an active market for STCs, ACIL Allen is not compelled to use market prices. This is mainly because historical prices might not be the best indicators of future prices as the market is designed to clear every year – so in theory prices could be \$40 or at least very close to it. This assumes that the CER provides an accurate forecast of created certificates underpinning the STP for the next year.

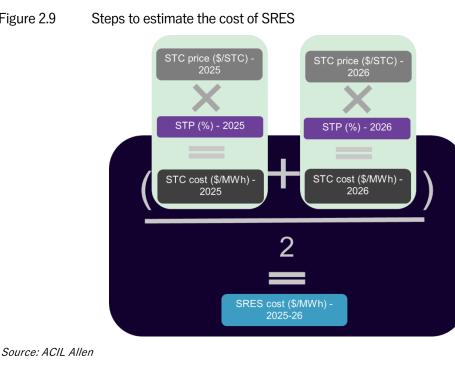


Figure 2.9

Energy losses

Some electricity is lost when it is transported over transmission and distribution networks to customers. As a result, retailers must purchase additional electricity to allow for these losses when supplying customers.

The components of the wholesale and environmental costs are expressed at the relevant regional reference node (RRN). Therefore, prices expressed at the regional reference node must be adjusted for losses in the transmission and distribution of electricity to customers - otherwise the wholesale and environmental costs are understated. The cost of network losses associated with wholesale and environmental costs is separate to network costs and are not included in network tariffs.

Distribution Loss Factors (DLF) for each distribution zone and average Marginal Loss Factors (MLF) for transmission losses from the node to major supply points in the distribution networks are applied to the wholesale energy cost estimates to incorporate losses.

The loss factors used are published by AEMO one year in advance for all NEM regions. Average transmission losses by network area are estimated by allocating each transmission connection point to a network based on their location. Average distribution losses are already summarised by network area in the AEMO publication.

As described by AEMO¹¹, to arrive at prices at the customer terminal (price at load connection point) the MLF and DLF are applied to the prices at the regional reference node (RRN) as follows:

Price at load connection point = RRN Price * (MLF * DLF)

The MLFs and DLFs used to estimate losses for the Final Determination for 2025-26 are based on the final 2025-26 MLFs and DLFs published by AEMO in April 2025.

¹¹ See Page 23 of the AEMO publication Treatment of loss factors in the national electricity market- July 2012

3 Responses to submissions to Draft Determination

The QCA forwarded to ACIL Allen a total of 10 submissions in response to its Draft Determination. ACIL Allen reviewed the submissions to identify issues that related to our methodology and required our consideration. A summary of the review is shown below in Table 3.1.

The key issues raised in the submissions cover the following broad areas:

- Feed-in-tariff methodology
- Treatment of rooftop PV exports
- Hedge products for energy and LGCs.

ID	Stakeholder	WEC	Hedge model	Environmental costs	NEM fees	Other costs	Rooftop PV Feed-in- tariffs
1	Bundaberg Ag Food & Fibre Alliance	Nil	Nil	Nil	Nil	Nil	Nil
2	Cotton Australia	Nil	Nil	Nil	Nil	Nil	Nil
3	Ergon Energy Corporation Limited (Ergon Energy Network) and Energex Limited (Energex)	Nil	Nil	Nil	Nil	Nil	Nil
4	Ergon Energy Queensland (EEQ)	Yes	Yes	Yes	Nil	Nil	Yes
6	Giru Benefitted Area Irrigation Committee	Nil	Nil	Nil	Nil	Nil	Nil
6	Gibson, J	Nil	Nil	Nil	Nil	Nil	Nil
7	Girgenti, S	Nil	Nil	Nil	Nil	Nil	Nil
8	Origin	Yes	Nil	Nil	Nil	Nil	Yes
9	Queensland Electricity Users Network	Nil	Nil	Nil	Nil	Nil	Nil
10	Queensland Farmers' Federation	Nil	Nil	Nil	Nil	Nil	Nil

Table 3.1Review of issues raised in submissions in response to Issues Paper

Note: Yes = an issue was raised that required ACIL Allen's consideration

Source: ACIL Allen analysis of QCA supplied documents

3.1 Feed-in tariff methodology

Origin Energy in its submission notes:

... we contend that the QCA should now focus on the avoided cost of solar PV exports to a retailer...

In practice, the value of solar exports fed into the grid is a function of wholesale spot prices for energy at the times of those exports. When solar is exported back into the grid retailers trade these exports with AEMO, receiving the wholesale spot price at the time. For this reason, the wholesale spot price is the relevant avoided energy cost in relation to the marginal unit of solar PV generation.

By choosing not to incorporate the timing of solar exports in the QCA calculation, solar exporting customers in regional Queensland are receiving a wholesale price that is higher than the observable wholesale market price or that could feasibly be provided by a potential competing retailer. Setting tariffs that reflect the market value of energy will provide an opportunity for retailers to enter the Ergon network providing enhanced customer choice and associated benefits.

ACIL Allen response

The methodology to estimate the solar rooftop PV feed-in tariff (FiT) for customers in regional Queensland is based on the notion of 'avoided cost' as required by the Minister's direction, and takes into account the portion of customers now on interval meters.

The methodology also recognises the importance of internal consistency with the methodology to estimate the WEC, so as to avoid a windfall gain to either consumers or retailers subject to the regulated WEC and FiT. The FiT methodology estimates the market value of PV exports for the portion of consumers on interval meters, and the avoided cost (WEC) for those consumers on accumulation meters, and takes the weighted average of these.

Consistent application of the FiT and WEC methodologies over time will result in a lower FiT and WEC as more consumers move on to interval meters (all other things equal). When all consumers are eventually on interval meters, the methodology will estimate a FiT based on all PV exports effectively being valued at the time of export. And similarly, the WEC methodology will estimate a WEC solely for imports.

3.2 Solar PV exports and hedging costs

EEQ in its submission notes that in practice retailers build their hedgebook based on their load profile which includes the carve out of rooftop PV exports, and this ought to be taken into account, and that the hedging strategy adopted in the WEC estimation methodology uses more caps than available in the market.

ACIL Allen response

The issues relating to PV exports presented by EEQ are largely the same as those raised in previous determinations.

ACIL Allen has previously addressed the treatment of rooftop PV exports in the estimation of the WEC extensively in previous determinations. In addition, we prepared a detailed standalone report on this matter for the AER, and refers EEQ to our report published on the AER's website as part of the 2024-25 determination¹².

ACIL Allen has addressed the matter of the volume of caps used in the WEC estimation methodology, and refers EEQ to our response in the Draft Determination, as well as previous determinations.

¹² https://www.aer.gov.au/documents/acil-allen-final-determination-default-market-offer-prices-2024-25-wholesale-energy-costs-androoftop-pv-exports-interaction-dmo-wec-estimation-methodology-solar-fits

3.3 LGCs

EEQ state that when estimating the cost of the LRET we are assuming that all LGCs are purchased on the forward market, and that we should consider the spot market for LGCs as an additional source for LGCs. EEQ state that retailers, if short LNGs, will purchase some of their liability from the LGC spot market closer to the liability date, as prices in the forward and sport market converge.

EEQ also raise concerns about using a single source of LGC contract data. Suggesting that doing so runs the risk of skewing the analysis, and suggest using more than one broker.

ACIL Allen response

As we have noted in many of our reports to the QCA, the purchasing of LGCs from the forward market is a proxy for the variety of strategies adopted by retailers.

4 Estimation of energy costs

4.1 Introduction

In this chapter we apply the methodology described in Chapter 2, and summarise the estimates of each component of the Total Energy Cost (TEC) for each of the blended NSLPs and interval meter demand profiles, and CLPs for 2025-26.

Historic demand and wholesale electricity spot price outcomes

Figure 4.1 shows the average time of day spot price for the Queensland region of the NEM, and the associated average time of day load profiles for the past 7 years. The graphs are useful in understanding the dynamics of the absolute and relative wholesale electricity price changes in the profiles.

Annual average wholesale electricity prices in Queensland in 2021-22 increased by about \$100/MWh when compared with 2020-21. This substantial increase is despite the continued uptake of rooftop PV putting downward pressure on price outcomes during daylight hours. The main reasons for the increase in prices overall are the:

- substantial increases in coal costs for the New South Wales and Queensland coal fired power stations that are exposed to the export coal market which experienced an increase in price from about USD\$150/t in July 2021 to about USD \$400/t in June 2022 due to the:
 - war in Ukraine and subsequent embargo of Russian trade in thermal coal
 - supply from some producers being voluntarily curtailed in late 2020 in response to the low export prices
 - a number of weather events also impacted coal supply chains
 - domestic reservation policies being invoked in Indonesia placing further pressure on supply.
- increase in coal price increased NEM spot price outcomes overnight and during the day when coal was at the margin.
- increase in gas costs across the NEM due to the strong increase in LNG netback (export) prices from around AUD\$11/GJ in July 2021 to about AUD\$40/GJ by May 2022, which increased NEM spot prices during the evening peak when gas was at the margin.
- Thermal power station outages, particularly in Queensland with the continued outage of Callide C Unit 4 as well as other plant outages (such as Kogan Creek in the first quarter of 2022) which contributed to an increase in price volatility across the evening peak periods.

In 2022-23:

- Export coal prices remained at about USD\$400/t until January 2023 at which point, they
 declined to about USD\$230/t.
- LNG netback prices in the first quarter of 2022-23 continued to grow to a peak of about AUD\$70/GJ in October 2022, and then declined to about AUD\$25/GJ.
- This resulted in wholesale electricity prices averaging around \$145/MWh in Queensland.
- We observe some impacts of the Government's December 2022 intervention of capping coal and gas prices, on wholesale electricity spot prices.

In 2023-24:

- Export coal prices declined further to about USD\$130/t.
- LNG netback prices declined further to about AUD\$15/GJ from the beginning of the 2023-24 financial year.
- This resulted in wholesale electricity prices reducing by about 39 per cent compared with 2022-23, averaging around \$88/MWh in Queensland.

In 2024-25 to date:

- Export coal prices commenced the financial year at about USD\$130/t but have declined to about USD\$105/t (although this is largely offset by a weakening Australian dollar such that the export coal price is largely stable in AUD terms).
- LNG netback prices have increased to about AUD\$20/GJ.
- This has resulted in wholesale electricity prices increasing by about 26 per cent averaging around \$111/MWh, in Queensland.


Between 2011-12 and 2019-20, the Queensland NSLP load profiles experienced a carving out of load during daylight hours with the increased penetration of rooftop solar PV. This resulted in the load profile becoming peakier over time and consequently, the demand weighted spot prices¹³ (DWP) for the NSLP load profiles have increased relative to the corresponding regional time weighted average spot price (TWP). The increase in solar output has greatly reduced prices during daylight hours which will increase the hedging costs for the NSLP and small interval meter imports all other things being equal.

However, over the past few years the rate of carve out of the NSLPs has slowed and this is most likely due to new rooftop solar PV installations being paired with the installation of interval meters – removing those consumers from the NSLP. For this reason, data has been obtained for residential and small business customers on interval meters. It can be seen that when combining the NSLP and interval meter data, the trend in carve out of demand during daylight hours has slowed – reflecting the separation of the PV exports from the profile since October 2021.

Finally, we note the change in shape of the Energex CLPs over the past two to three years – which shows a portion of controlled load has been shifted in to the daylight hour periods – when spot prices are much lower due to the large amounts of rooftop and utility scale PV generating into the market. That said, the CLP profiles remain peaky during the late evening period, and spot prices during the late evening have increased due to higher gas prices influencing wholesale electricity price outcomes when gas is at the margin.

¹³ The demand weighted price is in effect the unhedged wholesale energy cost that the retailers pay AEMO for the NSLP.


Figure 4.1 Actual average time of day wholesale electricity spot price (\$/MWh, nominal) and load profiles (MW, relative) – Queensland – 2018-19 to 2024-25

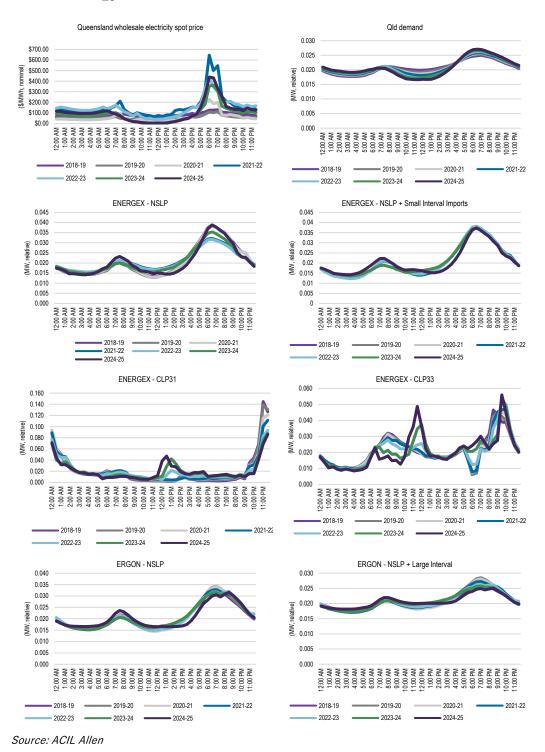



The graphs in Figure 4.2 show the actual annual DWP for each of the profiles compared with the regional TWP over the past 16 years. The DWP for the combined NSLP and small interval meter import profiles are at about a 39 per cent premium to the TWP on average over the past three years in Queensland. The premium reflects the correlation between the time of day level of demand and spot price outcomes.

37

As expected, the DWPs for the CLPs are below the DWP for the combined NSLP and small interval meter import profiles in each year. Although the rank order in prices by profile within each region has been consistent in each year, the dollar value differences between the prices has varied from one year to the next. For example, in 2011-12, the flat half-hourly price profile across all three regions resulted in the profiles having relatively similar wholesale spot prices (within their respective region). Conversely, in 2016-17, the increased price volatility across the afternoon period resulted in the NSLP DWPs diverging away from the CLP DWPs. Further, the time shifting of energy into daylight hours for some of the CLPs over the past few years has resulted in further separation in the CLP DWP from the combined NSLP and small interval meter import profile DWP.



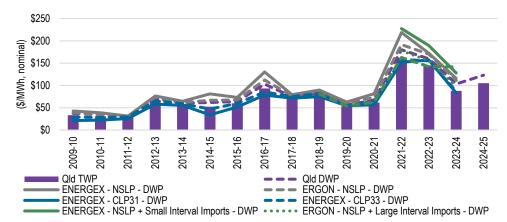




Source: ACIL Allen


The volatility of spot prices (timing and incidence) provides the incentive to a retailer to hedge their load, since hedging of the loads reduces a retailer's exposure to the volatility. The suite of contracts (as defined by base swap, cap and quarter) considered by the methodology does not change from one year to the next. However, the movement in contract price is the key contributor to movement in the estimated wholesale energy costs of the different profiles year on year, as is shown in Figure 4.3.

Compared with the 2024-25 futures, base contract prices for 2025-26 on an annualised and trade weighted basis to date, have increased by about \$4.60/MWh. Cap contract prices for 2025-26 on an annualised and trade weighted basis to date, have increased marginally by about \$0.40/MWh.

In previous determinations, we have noted that the cost of hedging the NSLP and small interval meter load is exacerbated by the expected continued uptake of rooftop PV carving out the system demand during daylight hours, coupled with the commissioning of utility scale solar. This continues to be the case for the 2025-26 determination, but it is worth noting that over the next 12-18 months about 7 GW of utility scale storage capacity is committed to enter the market. This additional storage capacity will soak up excess solar generation during daylight hours, so it is likely that there may be a stabilisation in price outcomes during daylight hours, rather than a continued increase in the propensity for negative price outcomes that has been observed over the past few years.

Regardless, low spot price outcomes occurring during daylight hours - much less than the base contact price, means that the retailer will need to pay its contract counterparty for the difference between the base contract price and the very low spot price when it is over hedged.



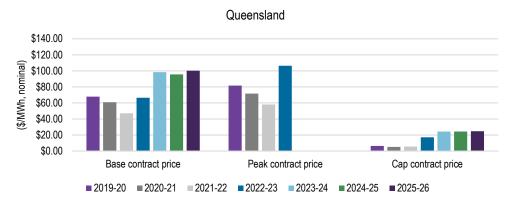

Source: ACIL Allen analysis of ASX Energy Data

4.2 Estimation of the Wholesale Energy Cost

Estimating contract prices

Contract prices for the 2025-26 year were estimated using the trade-weighted average of ASX Energy settlement prices of individual trades of contracts and exercised base options (including the trade weighted average premium for exercised and expired base options) since the contract was listed up until 9 May 2025. The inclusion of exercised options' strike prices and option premiums in this determination is a refinement of the methodology and reflects the increasing use of options in the futures market over the past 2 to 3 years.

Table 4.1 shows the estimated quarterly base and cap contract prices for 2025-26.

		et þ. 1999 (‡)	(
	Q3	Q4	Q1	Q2	
		2024-25			
Base	\$96.17	\$87.24	\$111.73	\$87.71	
Сар	\$18.60	\$20.17	\$39.48	\$19.42	
2025-26					
Base	\$97.19	\$90.36	\$120.99	\$92.89	
Сар	\$19.10	\$20.39	\$41.90	\$17.97	
Percentage change from 2024-25 to 2025-26					
Base	1%	4%	8%	6%	
Сар	3%	1%	6%	-7%	

Table 4.1Estimated contract prices (\$/MWh, nominal) - Queensland

Source: ACIL Allen analysis using ASX Energy data

The following charts show daily settlement prices and trade volumes for 2025-26 ASX Energy quarterly base and cap futures contracts up to 9 May 2025. It can be seen that the trading of these contracts tends to commence from mid to late 2022. That said, the volume of trades prior to 2023 is minimal, representing less than 25 percent of all trades to date (and for some products less than 10 per cent).

There is no trade in peak contracts which is not surprising given the carve out of demand during daylight hours. The traditional definition of the peak period (7am to 10pm weekdays) appears to be no longer relevant to market participants when considering managing spot price risk. Hence peak contracts are excluded from the analysis and are assumed not to contribute to the hedge portfolio, as per the previous three determinations.

There was a temporary spike in contract prices in 2022 due to the energy market crisis at the time, prior to the Government's intervention in late 2022. However, very few trades for 2025-26 occurred during this period.

Contract prices tended to increase in mid-2024 – corresponding with the increase in LNG prices as shown in Figure 4.6.

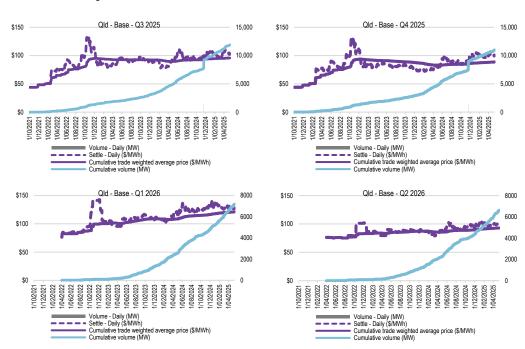


Figure 4.4 Time series of trade volume and price – ASX Energy base futures - Queensland

Source: ACIL Allen analysis using ASX Energy data


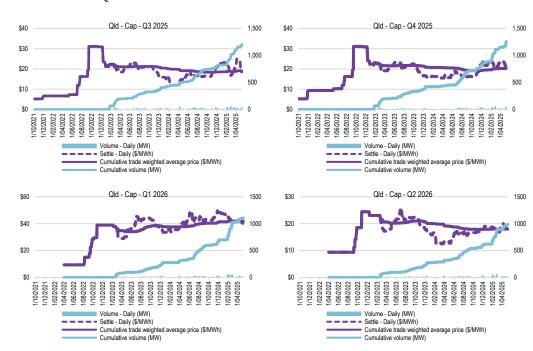


Figure 4.5 Time series of trade volume and price – ASX Energy \$300 cap futures – Queensland

Source: ACIL Allen analysis using ASX Energy data

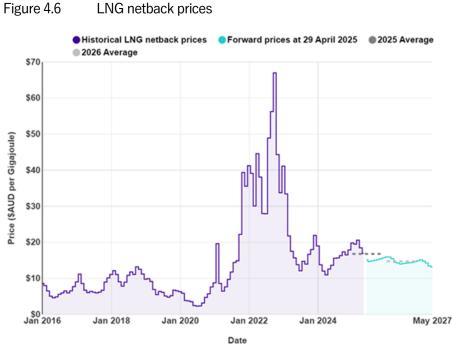

Source: ACCC (https://www.accc.gov.au/inquiries-and-consultations/gas-inquiry-2017-30/Ing-netbackprice-series)

Estimating wholesale spot prices

ACIL Allen's proprietary electricity model, *PowerMark* was run to estimate the hourly regional wholesale spot prices for the 594 simulations (54 demand and 11 outage sets).

Figure 4.7 shows the range of the upper one percent segment of the demand duration curves for the 54 simulated Queensland regional system demand sets resulting from the methodology for 2025-26, along with the range in historical demands since 2014-15. The simulated demand curves in the charts represent the upper, lower, and middle of the range of demand duration curves across all 54 simulated sets. It can be seen that the demand duration curves of the simulated demand sets for 2025-26 have a variation similar to that observed over the past five years - that is, the variation between the simulated demand sets does not just occur at the single peak annual demand but across a reasonable portion of the demands within the given simulation. This variation in demand contributes to the variation in modelled pool price outcomes as discussed further in this section.

We do not expect the simulated demand sets to line up perfectly with the historical demand sets, in terms of their absolute location. For example, the simulated demand sets for 2025-26 are generally higher than the pre-2016-17 observed demand outcomes in Queensland due to the step increase in demand due to the in-field compression associated with the LNG export projects in Gladstone. Further, the demand forecast for 2025-26 from AEMO's ESOO/ISP includes some growth due to the commencement of electrification in some sectors of the economy. What is important, is that the range in simulated outcomes reflects the range experienced in the past, indicating that the methodology is accounting for an appropriate degree of uncertainty.

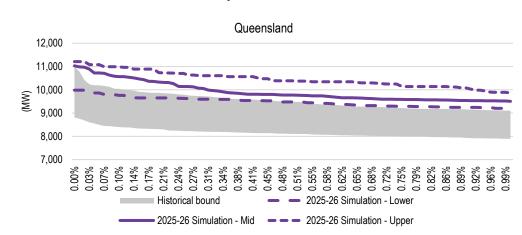


Figure 4.7 Comparison of upper one per cent of hourly regional system demands of 2025-26 simulated hourly demand sets with historical outcomes

Source: ACIL Allen analysis and AEMO data

Figure 4.8 shows the range of the simulated NSLP and interval meter imports envelope recent actual outcomes. This simulation results in the annual load factor¹⁴ for the 2025-26 simulated demand sets ranging between 28 per cent and 36 per cent compared with a range of 28 per cent to 31 per cent for the actual Energex NSLP and small customer interval meter demands.


All other things being equal, an increased peakiness of the load, which is hedged under the methodology, is likely to result in a larger degree of over hedging across the general day-time peak

42

¹⁴ The load factor is a measure of the peakiness in the half hourly load profile across a given period of time. The annual load factor is the average of the half hourly loads for the given year divided by the maximum of the half hourly loads for that same given year.

periods, resulting in a larger degree of over hedging overall on an annual basis, which means estimated hedging costs will increase. And the converse also holds.

Figure 4.8 Comparison of upper one per cent of hourly loads and load factors of 2025-26 simulated hourly demand sets with historical outcomes – Energex NSLP and small interval meter load

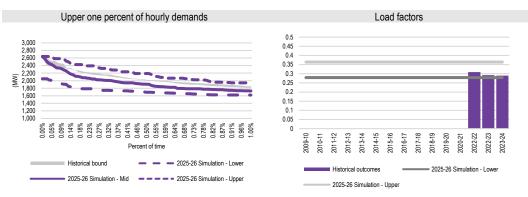

Source: ACIL Allen analysis and AEMO data

The chart in the upper left panel of Figure 4.9 compares the modelled annual regional TWP for the 594 simulations for 2025-26 with the regional TWPs from the past 10 years. Although there have been changes to both the supply and demand side of the market, the graph clearly shows that the simulations cover a wide range in potential spot price outcomes for 2025-26 when compared with the past 10 years of history.

Comparing the upper one percent of hourly prices from the simulations with historical spot prices (the upper right panel in Figure 4.9) shows the spread of the hourly prices from the simulations also more than adequately covers the historical spread of spot prices. It is also notable, that as would be expected, the distribution of simulated price outcomes demonstrates a strong positive skewness.

ACIL Allen is satisfied that PowerMark has performed adequately in capturing the extent and level of high price events based on the demand and outage inputs for the 594 simulations. The range in annual average contribution to the TWP, of hourly prices above \$300/MWh (shown in the mid left panel of Figure 4.9) for the 594 simulations is consistent with those recorded in history. For some of the 2025-26 simulations the contribution of price spikes is greater than historical levels, reflecting the general tightening of the demand-supply balance in the market during periods of lower availability of thermal and renewable power plant.


The mid right panel of Figure 4.9 compares the lower 99 per cent of hourly prices in the simulations with historical spot prices. The projected increase in uptake of rooftop PV coupled with the commissioning of the committed utility scale solar projects in Queensland by 2025-26 results in an increase in the proportion of hours in which the price is zero or negative.

The variation in the simulated hourly price duration curves in the mid right panel of Figure 4.9 is less than observed over the past 10 years. This is due to a single assumption of fuel prices adopted in the simulations, whereas the historical data will reflect changes in fuel prices over time.

The lower left panel of Figure 4.9 compares the annual average time of day prices in the simulations with historical time of day spot prices. The continued increase in rooftop PV penetration and development of utility scale solar is projected to reduce price outcomes in 2025-26 during daylight hours.

Based on these metrics, ACIL Allen is satisfied that in an aggregate sense the distribution of the 594 simulations for 2025-26 cover an adequately wide range of possible annual spot price outcomes.

Figure 4.9 Comparison of various metrics of hourly prices from the 2025-26 simulations with historical outcomes – Queensland

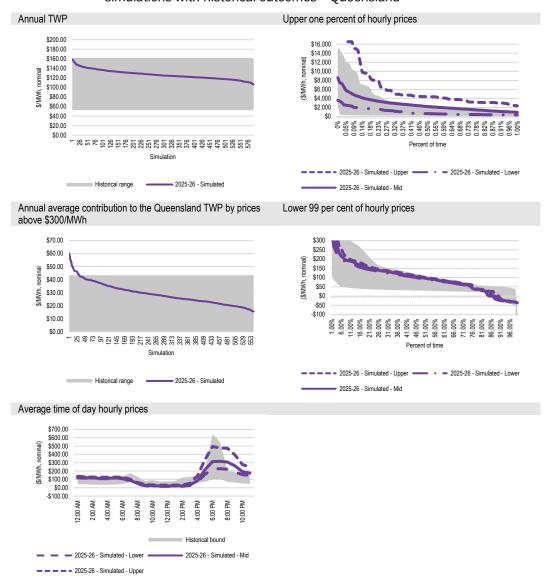

Source: ACIL Allen analysis and AEMO data


The maximum demand of the load profile is not in isolation a critical feature in determining the cost of supply. The shape and volatility of the load profile and its relationship to the shape and volatility of the regional demand/price traces is a critical factor in the cost of supplying the demand.

A test of the appropriateness of the simulated demand shape and its relationship with the regional demand shape can be undertaken by comparing the annual demand weighted price (DWP) for the given demand profile with the corresponding regional TWP. Figure 4.10 shows that, for the past three financial years, the DWP for NSLP and small interval meter loads as a percentage premium over the corresponding regional TWPs has varied between 30 and 45 percent in Queensland. In the 594 simulations for 2025-26 for each NSLP and interval meter demand profile, this percentage varies from 30 percent to 40 percent.

The modelling suggests a slightly narrower range in the premium for 2025-26 as a result of the commissioning of about 2 GW of utility scale storage in Queensland by 2026.

Included in Figure 4.10 is a comparison showing the correlation in the growth in premium over the past few years and the increasing market share of utility scale solar output.

Figure 4.10 Simulated annual DWP for NSLP and Interval meter demand as a percentage premium of annual TWP for 2025-26 compared with range of actual outcomes in past years, and market share of utility scale solar (%)

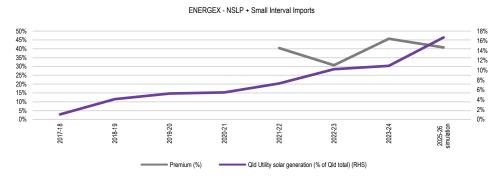

Source: ACIL Allen

ACIL Allen is satisfied the modelled regional wholesale spot prices from the 594 simulations cover the range of expected price outcomes for 2025-26 across all three regions in terms of annual averages and distributions. These comparisons clearly show that the 54 simulated demand and renewable energy resource traces combined with the 11 thermal power plant outage scenarios provide a sound basis for modelling the expected future range in spot market outcomes for 2025-26.

Applying the hedge model

The hedging methodology uses a simple hedge book approach based on standard quarterly base swaps and cap contracts as a proxy for a retailer's hedging strategy.

Contract volumes adopted for the hedging strategy for 2025-26 are calculated for each settlement class for each quarter as follows:

The contract volumes are calculated for the NSLP and interval meter load for each quarter as follows:

- The base contract volume is set to equal the 50th percentile of all hourly demands across all 54 demand sets for the quarter.
- The cap contract volume is set at 100 per cent of the median of the annual peak demands across the 54 demand sets minus the base contract volumes. This is a slight increase from the 2024-25 Determination and is due to the stabilisation in cap contract prices relative to base prices. The optimal hedging strategy allows for a small amount of exposure to the spot market.

These same hourly hedge volumes (in MW terms) apply to each of the 54 demand sets for a given NSLP and year, and hence to each of the 594 simulations. To be clear, we are not altering the hedge volume (in MW terms) on an ex-post basis for each of the 54 demand sets. Therefore, the approach we use results in a hedging strategy that does not rely on perfect foresight but relies on an expectation of the distribution of hourly demands across a range of weather-related outcomes.

Once established, these contract volumes are then fixed across all 594 simulations when calculating the wholesale energy cost. The contract volumes used are shown in Figure 4.11.

The contracting strategy places no reliance on peak contracts. This is not surprising – the carve out of demand during daylight hours (which makes up a reasonable part of the peak hours on business days), and the corresponding low spot prices during those hours makes the peak contacts generally unappealing. It is during these periods that the load will be over contracted and hence in effect retailers will be selling back to the market the extent of this over contracted position at the much lower spot prices. Further, the strategy's non-reliance on peak contracts matches well with the very small or nil volume of peak contracts traded relative to base contracts in the actual futures market.

The example profile in Figure 4.11 is from a simulation that includes loads above the P50 peak in some cases and hence are not 100 per cent covered by hedge contracts.

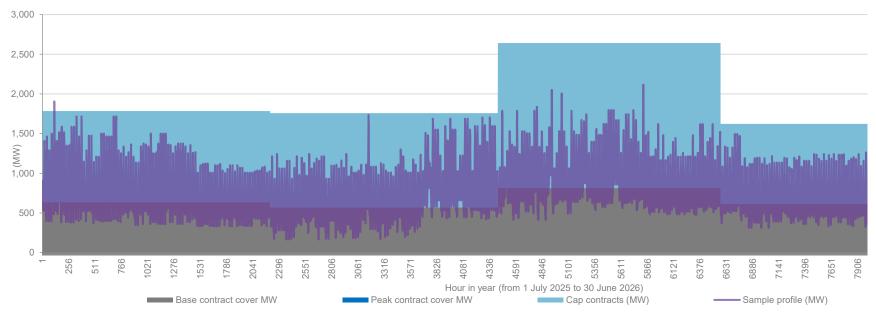



Figure 4.11 Contract volumes used in hedge modelling of 594 simulations for 2025-26 for Energex NSLP + small interval meter import load

Source: ACIL Allen

Figure 4.12 shows that, by using the above contracting strategy, the variation in the WEC (or annual hedged price) for each demand profile is far less than the variation if the profile was to be supplied without any hedging and relied solely on spot price outcomes.

It is worth noting the WEC outcomes for the NSLP plus small interval meter load are lower than the spot price outcomes. This is a result of the trade weighted average contract prices used in the WEC estimation being lower than the spot price simulations, and lower than current contract price values for 2025-26 (which reflects the current consensus view of where spot price outcomes for 2025-26 will eventuate). In other words, as noted earlier, contract prices for 2025-26 have increased over the past six or so months, but the trade weighted average is lagging behind this uptick.

Figure 4.12 Annual WEC and DWP (\$/MWh, nominal) for the Energex NSLP + small interval meter demands for the 594 simulations – 2025-26

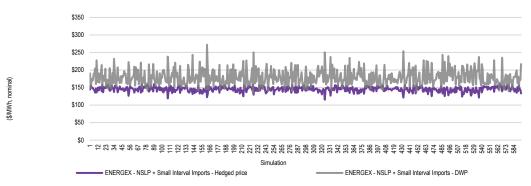

Source: ACIL Allen

Summary of estimated Wholesale Energy Cost

After applying the hedge model, the final WEC estimate is taken as the 95th percentile of the distribution containing 594 WECs (the annual hedged prices). ACIL Allen's estimate of the WEC for each demand profile for 2025-26 are shown in Table 4.2 and compared to the WEC estimates in the 2024-25 Final Determination.

Table 4.2 Estimated WEC (\$/MWh, nominal) for 2025-26 at the regional reference nod	Table 4.2	Estimated WEC (\$/MWh,	nominal) for 2025-26 at the	regional reference node
---	-----------	------------------------	-----------------------------	-------------------------

Settlement class	2024-25 – Final Determination	2025-26 – Final Determination	Change from 2024- 25 to 2025-26 (%)
Energex - Residential and small business	\$162.95	\$155.47	-5%
Energex - Controlled load tariff 9000 (31)	\$96.08	\$103.88	8%
Energex - Controlled load tariff 9100 (33)	\$103.67	\$111.89	8%
Energex - Unmetered supply	\$162.95	\$155.47	-5%
Ergon Energy - CAC and ICC	\$99.58	\$101.35	2%
Ergon Energy - SAC demand and street lighting	\$114.53	\$115.11	1%
Energex – Small business primary load control tariff	\$115.59	\$131.17	13%
Ergon – Large business primary and secondary load control tariffs	\$103.67	\$111.89	8%
Energex - Residential and small business - Time varying tariffs			
Time varying 1- Night	\$154.86	\$153.95	-1%
Time varying 1 - Day	\$60.48	\$41.69	-31%
Time varying 1- Evening Peak	\$246.31	\$253.43	3%
Time varying 2- Shoulder (Night)	NA	\$141.43	NA
Time varying 2 – Off-peak (Daylight)	NA	\$36.01	NA
Time varying 2- Peak (Evening)	NA	\$235.80	NA
Time varying 3- Shoulder (Night)	NA	\$142.64	NA
Time varying 3 – Off-peak (Daylight)	NA	\$39.86	NA
Time varying 3- Peak (Evening)	NA	\$245.54	NA

Source: ACIL Allen

The 2025-26 WEC for the Energex NSLP plus small interval meter import demands decreases by about 5 per cent compared with 2024-25 reflecting a slight flattening of the profile and a higher reliance on caps which have increased only marginally in price, whereas the WEC of the other profiles increase by between one and 13 per cent reflecting a higher reliance on base contracts which have increased in price.

The WEC for the "Ergon Energy - SAC demand and street lighting" tariff increases by less than one per cent. The load profile used for this tariff is the Ergon NSLP and large interval meter import loads. This profile has flattened slightly as shown in the bottom right panel in **Figure 4.1** – presumably due to the continued rollout of interval meters for customers in the Ergon region, reducing the extent of the PV export carveout – which has offset to a reasonable extent the increase in contract prices.

The WEC for each profile is unlikely to change by the same amount between determinations – whether in dollar or percentage terms – due to their different demand shapes and differences in how the demand shapes and spot price shapes are changing over time.

Do the changes in WEC make intuitive sense?

There has been an increase in wholesale spot prices over the past 12 months, and this generally aligns with the trend in the estimated WECs. However, the WEC for the Energex NSLP and small interval meter import demand has decreased slightly.

Hence the estimated WECs warrant further investigation to ensure the estimated changes align with what is observed in the market. The charts below plot the changes in WECs and trade weighted contract prices from this Determination together with previous final determinations.

The charts in the left column plot the annual change, and the chart in the right column plot the cumulative change since 2019-20 (using 2019-20 as the base observation). Key features of the charts are:

- Overall, the year-on-year trend in estimated WECs follows the trend in contract prices.
- The trend in WECs aligns very closely to the trend in base contract prices. This is not surprising given the stronger reliance on base contracts in the hedging strategy.
- However, the trend in WEC is also influenced by the change in cap prices. The charts show changes in percentage terms, and given that cap contract prices are lower than base contract prices in dollar terms, it is not surprising that the percentage changes in cap contact prices are larger than changes in the base contract prices and WECs (since they are starting from a lower base).

There has been no occasion in which the movement in the WEC is at odds with the movement in observable trade weighted average contract prices. The possible exception is the Queensland WEC in 2025-26 – which decreases slightly even though there is an increase in the trade weighted average base contract prices. This is largely due to the slight flattening of the profile over the past 12-18 months as demonstrated in Figure 4.1 – this makes the profile less expensive to hedge (all other things equal).

On this basis, ACIL Allen is satisfied that the methodology is appropriately estimating the WECs for 2025-26, and that the estimated WECs reflect the consensus view of market conditions for the given determination year in the two to three year period leading up to the time the determination was made – reflecting that retailers build up their hedge book over time, and in the case of 2025-26, purchased hedges in 2023-24 and 2024-25 when the expectation at that time was that prices in 2025-26 were going to remain at elevated levels or even increase slightly.

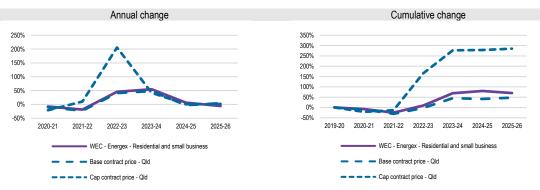


Figure 4.13 Change in WEC and trade weighted contract prices (%) – 2019-20 to 2025-26

Note: Cumulative change uses 2019-20 as the base observation.

Source: ACIL Allen analysis

4.3 Estimation of renewable energy policy costs

Renewable energy scheme (RET)

The RET scheme consists of two elements – the Large-scale Renewable Energy Target (LRET) and the Small-scale Renewable Energy Scheme (SRES). Liable parties (i.e. all electricity retailers¹⁵) are required to comply and surrender certificates for both LRET and SRES.

Energy costs associated with the LRET and the SRES have been estimated using price information from brokers TraditionAsia, information published by the Clean Energy Regulator (CER) and modelling by ACIL Allen.

Retailer compliance with these schemes operates on a calendar year basis and hence estimates are required for 2025 and 2026 calendar years, with the costs averaged to estimate the 2025-26 financial year costs.

To estimate the costs to retailers of complying with both the LRET and SRES, ACIL Allen uses the following elements:

- historical Large-scale Generation Certificate (LGC) market forward prices for 2025 and 2026 from brokers TraditionAsia
- estimated Renewable Power Percentages (RPP) values for 2025 and 2026 of 17.91 per cent¹⁶
- binding Small-scale Technology Percentage (STP) value for 2025 of 13.89 per cent, as published by CER
- estimated STP value for 2026 of 11.79 per cent¹⁷
- CER clearing house price¹⁸ for 2025 and 2026 for Small-scale Technology Certificates (STCs) of \$40/MWh.

LRET

To translate the aggregate LRET target for any given year into a mechanism such that liable entities under the scheme may determine how many LGCs they must purchase and acquit, the LRET legislation requires the CER to publish the RPP by 31 March within the compliance year.

The RPP is determined ex-ante by the CER and represents the relevant year's LRET target (in fixed GWh terms) as a percentage of the estimated volume of liable electricity consumption throughout Australia in that year.

The estimated cost of compliance with the LRET scheme is derived by applying the RPP to the determined LGC price to establish the cost per MWh of liable energy supplied to customers. Since the cost is expressed as a cost per MWh, it is applicable across all retail tariffs.

ACIL Allen has estimated the average LGC price using LGC forward prices provided by broker TraditionAsia up to 9 May 2025.


¹⁵ Emissions Intensive Trade Exposed (EITE) industries such as aluminium are wholly or partially exempted and receive Partial Exemption Certificates (PEC) to be surrendered to the named liable entity.

¹⁶ The RPP values for 2025 and 2026 are based on the CER's published RPP for 2025 and assumes no change in liable acquisitions and the CER-published mandated LRET targets for 2025 and 2026.

¹⁷ The STP value for 2026 is the CER's published non-binding value and align closely with ACIL Allen's estimate of the non-binding STP based on our engagement with the CER (see <u>https://cer.gov.au/document/stc-modelling-report-acil-allen-august-2024</u>).

¹⁸ Although there is an active market for STCs, ACIL Allen is not compelled to use market prices. This is mainly because historical prices might not be the best indicators of future prices as the market is designed to clear every year – so in theory prices could be \$40 or at least very close to it. This assumes that the CER provides an accurate forecast of created certificates underpinning the STP for the next year.

The LGC price used in assessing the cost of the scheme for 2025-26 is found by taking the trade-weighted average of the forward prices for the 2025 and 2026 calendar years, respectively, since the contracts commenced trading. This is typically about 2.5 years prior to the commencement of the compliance year (see Figure 4.14). The average LGC prices calculated from the TraditionAsia data are \$37.49/MWh for 2025 and \$30.81/MWh for 2026.

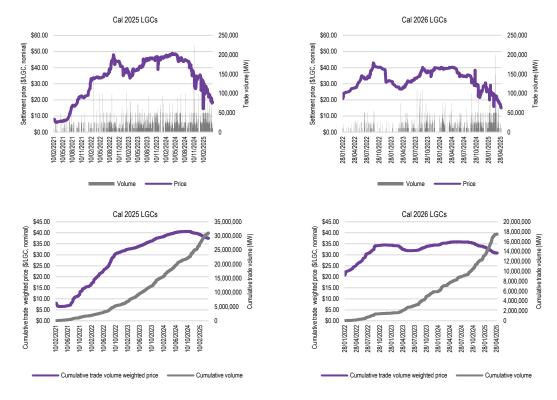



Source: ACIL Allen analysis of TraditionAsia

The RPP value for 2026 is yet to be set by the CER. Therefore, the RPP value for 2026 is estimated by using the mandated target of 33 TWh and the CER's published cumulative adjustment and estimate of electricity acquisitions in 2025 of 178.90 TWh. In other words, ACIL Allen has assumed electricity acquisitions remain constant in 2025 and 2026, and hence the RPP values for 2025 and 2026 are both 17.91 per cent.

Key elements of the 2025 and 2026 RPP estimation are shown in Table 4.3.

Table 4.3 Estimating the 2025 and 2026 RPP values

	2025	2026 (estimate based on 2025 RPP)
LRET target, incl. cumulative adjustment, MWh (CER)	32,049,603	32,049,603
Relevant acquisitions minus exemptions, MWh (CER)	178,900,000	178,900,000
Estimated RPP	17.91%	17.91%

Source: ACIL Allen analysis of CER data

ACIL Allen calculates the cost of complying with the LRET in 2025 and 2026 by multiplying the RPP values for 2025 and 2026 by the trade volume weighted average LGC prices for 2025 and 2026, respectively. The cost of complying with the LRET in 2025-26 was found by averaging the calendar estimates.

Therefore, ACIL Allen estimates the cost of complying with the LRET scheme to be \$6.12/MWh in 2025-26 as shown in Table 4.4.

Table 4.4 Estimated cost of LRET – 2025-26

	2025	2026	Cost of LRET 2025- 26
RPP %	17.91%	17.91%	
Trade weighted average LGC price (\$/LGC, nominal)	\$37.49	\$30.81	
Cost of LRET (\$/MWh, nominal)	\$6.72	\$5.52	\$6.12

Source: ACIL Allen analysis of CER data

SRES

The cost of the SRES is calculated by applying the estimated STP value to the STC price in each compliance (calendar year). The average of these calendar year costs is then used to obtain the estimated costs for 2025-26.

ACIL Allen estimates the cost of complying with SRES to be \$5.14/MWh in 2025-26 as set out in Table 4.5.

	Table 4.5	Estimated cost of SRES -	2025-26
--	-----------	--------------------------	---------

	2025	2026	Cost of LRET 2025- 26
STP %	13.89%	11.79%	
STC clearing house price (\$/STC,			
nominal)	\$40.00	\$40.00	
Cost of SRES (\$/MWh, nominal)	\$5.56	\$4.72	\$5.14

Source: ACIL Allen analysis of CER data

Summary of estimated LRET and SRES costs

Adding these component costs gives a total cost requirement for 2025-26 as set out in Table 4.6.

Since the 2024-25 estimate, the cost of LRET has decreased by around 19 per cent, driven by lower LGC prices for 2025-26, and the cost of SRES has decreased by 31 per cent, driven by the decrease in the STP.

Table 4.6	Total renewable energy policy costs (\$/MWh, nominal) – 2025-26
-----------	---

	2024-25	2025-26	
LRET	\$7.54	\$6.12	
SRES	\$7.48	\$5.14	
Total	\$15.02	\$11.26	

Source: ACIL Allen analysis of CER data

4.4 Estimation of other energy costs

The estimates of other energy costs for the Final Determination provided in this section consist of:

- market fees and charges including:
 - NEM management fees
 - Ancillary services costs
- pool and hedging prudential costs
- the Reliability and Emergency Reserve Trader (RERT).

NEM management fees

NEM management fees are payable by retailers to AEMO to cover operational expenditure, costs associated with full retail contestability (FRC), the Energy Consumers Australia (ECA), DER, IT system upgrades for 5MS and the NEM 2025 Reform Program.

The estimate for the NEM management fees is taken from AEMO's 2025-26 budget and fees report.

Based on the fees provided by AEMO's Draft *FY26 Budget and Fees*, we estimate the total NEM fees for 2025-26 to be \$0.57/MWh and \$0.27/week for the variable and fixed components respectively. The breakdown of total fees is shown in Table 4.7.

Cost category	2024-25 (variable, \$/MWh)	2024-25 (fixed, \$/week)	2025-26 (variable, \$/MWh)	2025-26 (fixed, \$/week)
NEM fees (admin, registration, etc.)	\$0.29525	\$0.09228	\$0.30854	\$0.09515
FRC - electricity	\$0.00000	\$0.03609	\$0.00000	\$0.04330
ECA - electricity	\$0.00000	\$0.01343	\$0.00000	\$0.02058
DER fee	\$0.01344	\$0.00420	\$0.04031	\$0.01243
IT upgrade and 5MS/GS compliance	\$0.0986	\$0.03082	\$0.1134	\$0.03497
National Electricity Market (NEM) 2025 Reform Program	\$0.0968	\$0.05151	\$0.1122	\$0.05890
Total NEM management fees	\$0.50409	\$0.22833	\$0.57443	\$0.26533

Table 4.7 NEM management fees (\$, nominal) – 2025-26

Source: ACIL Allen analysis of AEMO reports

Ancillary services

AEMO provides weekly aggregated settlements data for ancillary service payments in each interconnected region. Using the average costs in each region over the preceding 52 weeks (as at 9 May 2025) of available NEM ancillary services data as a basis for 2025-26, the estimated cost of ancillary services is shown in Table 4.8. This is a reasonable increase (in percentage terms at least) compared with the value used in the 2024-25 determination. According to AEMO's *Quarterly Energy Dynamics Q4 2024* report, on 11 October

2024, Queensland incurred ancillary services costs of \$22 million – this cost for the single day equates to about 37 per cent of the NEM's cost for the entire quarterly. Planned network outages affecting QNI increased Queensland's risk of separating from the NEM, thus requiring local enablement of frequency control ancillary services (FCAS), which drove the local price for the contingency raise 6-second (R6SE) service to the market price cap.

Table 4.8	Ancillary services (\$/MWh, nominal) – Queensland, 2025-26
-----------	--

2024-25	2025-26
\$0.21	\$0.74

Source: ACIL Allen analysis of AEMO data

Prudential costs

Prudential costs have been calculated for each jurisdiction NSLP and interval meter load profile. The prudential costs for the profiles are then used as a proxy for prudential costs for the controlled load profiles in the relevant jurisdiction.

AEMO prudential costs

AEMO calculates a maximum credit limit for each counterparty in order to determine the requirement for any or a combination of:

- bank guarantees
- reallocation certificates
- prepayment of cash.

There is no fundamental requirement to reallocate prudential obligations – it is a retailer's choice to do so. Assuming no reallocation and no vertical integration (either owned generation or PPAs), a retailer is required to provide suitable guarantees to the AEMO assessed maximum credit limit (MCL) which is calculated as follows:

MCL = OSL + PML

Where for the Summer (December to March), Winter (April to August) and Shoulder (other months):

OSL = (Average daily load x Average future expected spot price x Participant Risk Adjustment Factor * OS Volatility factor x (GST + 1) x 35 days

PML = (Average daily load x Average future expected spot price x Participant Risk Adjustment Factor * PM Volatility factor x (GST + 1) x 7 days

Taking a 1 MWh average daily load and assuming the inputs in Table 4.9 for each season for the Energex NSLP and small interval meter load gives an estimated MCL of \$16,086.

However, as this applies for a rolling 42 days it actually covers 42 MWh of retailer purchases. Hence the portion of the MCL applicable to each MWh in the Energex NSLP is \$16,086/42 = \$383/MWh.

The cost of funding a bank guarantee for the MCL associated with the single MWh is assumed to be a 2.5 percent annual charge for 42 days or 2.5%*(42/365) = 0.288 percent. Applying this funding cost to the single MWh charge of \$383 gives \$1.10/MWh.

The components of the AEMO prudential costs for Ergon NSLP and large interval meter load are shown in Table 4.10.

Table 4.9 AEMO prudential costs for Energex NSLP and small interval meter load – 2025-26
--

	Summer	Winter	Shoulder
Load Weighted Expected Price (\$/MWh, nominal)	\$197.85	\$138.85	\$91.68
Participant Risk Adjustment Factor	1.4834	1.2143	1.2991
OS Volatility factor	1.51	1.53	1.48
PM Volatility factor	2.86	2.44	1.90
OSL	\$20,780	\$10,945	\$7,735
PML	\$4,156	\$2,189	\$1,547
MCL	\$24,936	\$13,134	\$9,282
Average MCL		\$16,086	
AEMO prudential cost (\$/MWh, nominal)		\$1.10	

Source: ACIL Allen analysis of AEMO data

Table 4.10 AEMO prudential costs for Ergon NSLP and large interval meter load – 2025-26

	Summer	Winter	Shoulder
Load Weighted Expected Price (\$/MWh, nominal)	\$197.85	\$138.85	\$91.68
Participant Risk Adjustment Factor	0.9142	0.9036	0.8396
OS Volatility factor	1.51	1.53	1.48
PM Volatility factor	2.86	2.44	1.90
OSL	\$10,054	\$7,025	\$4,019
PML	\$2,011	\$1,405	\$804
MCL	\$12,065	\$8,430	\$4,823
Average MCL		\$8,736	
AEMO prudential cost (\$/MWh, nominal)		\$0.60	

Source: ACIL Allen analysis of AEMO data

Hedge prudential costs

ACIL Allen has relied on the futures market to determine hedging costs. The futures market includes prudential obligations by requiring entities to lodge initial margins (we assume cash) when contracts are purchased or sold. We understand that the cash that is lodged as an initial margin receives a money market related return which offsets some of the funding costs. The assumed money market rate is 4.10 per cent. Additional margin calls may apply where contracts move unfavourably for the purchaser or seller. However, as these may be favourable or unfavourable, we have assumed that they average out over time.

We understand that the initial margin is set based on three parameters (in this case for Queensland region) being:

- the price scanning range (PSR) expressed as a percentage of the contract face value and currently set at around 18 percent on average for a base contract, and 21 percent for a cap contract
- the intra monthly spread charge currently set at \$12,300 for a base contract of 1 MW for a quarter, and \$5,900 for a cap contract
- the spot isolation rate currently set at \$1,500 for a base contract, and \$600 for a cap contract.

Using the annual average futures price and applying the above factors gives an average initial margin for each quarter (rounded up) as shown for Queensland in Table 4.11. This is divided by the average hours in a quarter. Then applying the assumed funding cost of 9.15 per cent but adjusted for an assumed 4.10 per cent return on cash lodged with the clearing (giving a net funding cost of 5.05 percent) results in the prudential cost per MWh for each contract type.

Average initial margins for Queensland using the average contract prices and initial margin parameters results in a prudential cost per MWh for each contract type as shown in the right column of Table 4.11.

Contract Type	Average contract price	Initial margin (rounded up to nearest \$1000)	Prudential cost per MWh
Base	\$100.27	\$53,000	\$1.22
Сар	\$24.77	\$28,000	\$0.65

 Table 4.11
 Hedge Prudential funding costs by contract type – Queensland 2025-26

Source: ACIL Allen analysis of ASX Energy and RBA data

However, the hedge model used is designed to conservatively cover all load at the extremes and so results in an over-contracted position against the average load. The volume of hedges (MWh) in each category have been calculated as a proportion of the average annual load in each jurisdiction NSLP and interval meter demand to give a proportional factor. The product of the prudential cost per MWh for each contract type and the proportion of each contract in the hedge model profile provides the total hedge prudential cost per MWh associated with each contract type. These are then summed to establish the total hedge prudential costs for Energex and Ergon as shown in Table 4.12 and Table 4.13.

Table 4.12	Hedge Prudential funding costs for ENERGEX NSLP and small interval meter load –
	2025-26

	Prudential cost per MWh	Proportion of contract hedged against average annual energy	Hedge prudential cost per MWh
Base	\$1.22	0.8718	\$1.07
Сар	\$0.65	1.7133	\$1.11
Total cost		\$2.17	

Source: ACIL Allen

	Prudential cost per MWh	Proportion of contract hedged against average annual energy	Hedge prudential cost per MWh
Base	\$1.22	0.9664	\$1.18
Сар	\$0.65	0.4738	\$0.31
Total cost		\$1.49	

Table 4.13Hedge Prudential funding costs for ERGON NSLP and large interval meter load –2025-26

Source: ACIL Allen

Total prudential costs

Adding the AEMO and hedge prudential costs gives a total prudential requirement for 2025-26 as set out in Table 4.14 . Prudential costs for 2025-26 are higher than 2024-25 due to higher contract prices expected across 2025-26.

Table 4.14	Total prudential costs (\$/MWh, nominal) – 2025-26
------------	--

Jurisdiction	2024-25	2025-26
Energex NSLP and small interval meter load	\$2.30	\$3.27
Ergon NSLP and large interval meter load	\$1.71	\$2.09

Source: ACIL Allen

Reliability and Emergency Reserve Trader (RERT)

As with the ancillary services, we take the RERT costs as published by AEMO for the 12-month period prior to the Determination.

Excluding the June 2022 NEM events, AEMO has not activated the RERT for the 12-month period prior to the Final Determination in Queensland.

Hence, the RERT costs for Queensland are set at \$0.00/MWh.

Retailer Reliability Obligation

The RRO is not currently triggered for Queensland for 2025-26.

June 2022 NEM events

To estimate the costs of the June 2022 NEM events, ACIL Allen uses AEMO's published estimates of the costs of the June 2022 events, as well as AEMC's final decisions on administered pricing compensation claims.

As at 9 May 2025 no updated finalised costs have been published since the 2024-25 Final Determination for Queensland.

Summary of estimated total other costs

Adding these component costs gives a total other cost requirement as set out in Table 4.15 and Table 4.16. These tables exclude the fixed NEM Fees cost of \$0.27 per week per customer – which averages about \$1-2/MWh depending on the level of consumption.

Table 4.15	Total of other costs (\$/MWh, nominal) – Energex – 2025-26
------------	--

Cost category	2024-25	2025-26
NEM management fees	\$0.50	\$0.57
Ancillary services	\$0.21	\$0.74
Hedge and pool prudential costs	\$2.30	\$3.27
Reserve and Emergency Reserve Trader costs	\$0.00	\$0.00
AEMO Direction costs	\$0.00	\$0.00
June 2022 NEM events	\$0.00	\$0.00
Total	\$3.02	\$4.58

Note: The values exclude the fixed NEM Fees cost of \$0.27 per week per customer – which averages about \$1-2/MWh depending on the level of consumption.

Source: ACIL Allen analysis

Cost category	2024-25	2025-26
NEM management fees	\$0.50	\$0.57
Ancillary services	\$0.21	\$0.74
Hedge and pool prudential costs	\$1.71	\$2.09
Reserve and Emergency Reserve Trader costs	\$0.00	\$0.00
AEMO Direction costs	\$0.00	\$0.00
June 2022 NEM events	\$0.00	\$0.00
Total	\$2.43	\$3.39

Table 4.16 Total of other costs (\$/MWh, nominal) – Ergon – 2025-26

Note: The values exclude the fixed NEM Fees cost of \$0.27 per week per customer – which averages about \$1-2/MWh depending on the level of consumption.

Source: ACIL Allen analysis

4.5 Estimation of energy losses

The estimated wholesale energy costs resulting from the analysis is referenced to the Regional Reference Node (RRN). These estimates need to be adjusted for transmission and distribution losses associated with transmitting energy from the Regional Reference Node to end-users. Distribution Loss Factors (DLF) for each jurisdiction and average Marginal Loss Factors (MLF) for transmission losses from the node to major supply points in the distribution networks are applied to the wholesale energy cost estimates to incorporate losses.

Losses for the Final Determination are based on the MLFs and DLFs published by AEMO in April 2025.

The estimation of transmission and distribution loss factors for the settlement classes to be used in calculating energy costs for 2025-26 is shown in Table 4.17.

		2024-25		2025-26			
	Distribution loss factor (DLF)	Transmission marginal loss factor (MLF)	Total loss factors (MLFxDLF)	Distribution loss factor (DLF)	Transmission marginal loss factor (MLF)	Total loss factors (MLFxDLF)	
Energex – Residential and small business	1.066	1.009	1.076	1.052	1.008	1.061	
Energex – Controlled load tariff 9000 (31)	1.066	1.009	1.076	1.052	1.008	1.061	
Energex – Controlled load tariff 9100 (33)	1.066	1.009	1.076	1.052	1.008	1.061	
Energex - unmetered supply	1.066	1.009	1.076	1.052	1.008	1.061	
Ergon Energy - CAC and ICC	1.034	0.979	1.012	1.028	0.986	1.013	
Ergon Energy - SAC demand and street lighting	1.098	0.979	1.074	1.092	0.986	1.076	
Energex – Small business primary load control tariff	1.066	1.009	1.076	1.052	1.008	1.061	
Ergon – Large business primary and secondary load control tariffs	1.098	0.979	1.074	1.092	0.986	1.076	

Table 4.17 Estimated transmission and distribution losses

Source: ACIL Allen analysis of AEMO data

As described by AEMO¹⁹, to arrive at prices at the customer terminal (price at load connection point) the MLF and DLF are applied to the prices at the regional reference node (RRN) as follows:

Price at load connection point = RRN Spot Price * (MLF * DLF)

¹⁹ See Page 23 of the AEMO publication *Treatment of loss factors in the national electricity market- July 2012*

4.6 Summary of estimated energy costs

Drawing together the analyses and estimates from the previous sections of this report, ACIL Allen's estimates of the 2025-26 total energy costs (TEC) for each of the profiles are presented in Table 4.18.

These tables exclude the fixed NEM Fees cost of \$0.27 per week per customer – which averages about \$1-2/MWh depending on the level of consumption.

					. ,			
	WEC at Qld reference node (\$/MWh)	Renewable energy costs at Qld reference node (\$/MWh)	Other costs Qld reference node (\$/MWh)	Total transmission and distribution loss factor (MLF x DLF)	Network losses (\$/MWh)	TEC at the customer terminal (\$/MWh)	Change from 2024-25 Final Determination (\$/MWh)	Change from 2024-25 Final Determination (%)
Energex – Residential and small business	\$155.47	\$11.26	\$4.58	1.061	\$10.45	\$181.76	-\$12.99	-6.67%
Energex – Controlled load tariff 9000 (31)	\$103.88	\$11.26	\$4.58	1.061	\$7.30	\$127.02	\$4.23	3.44%
Energex – Controlled load tariff 9100 (33)	\$111.89	\$11.26	\$4.58	1.061	\$7.79	\$135.52	\$4.56	3.48%
Energex – unmetered supply	\$155.47	\$11.26	\$4.58	1.061	\$10.45	\$181.76	-\$12.99	-6.67%
Ergon Energy – CAC and ICC	\$101.35	\$11.26	\$3.39	1.013	\$1.51	\$117.51	-\$0.91	-0.77%
Ergon Energy - SAC demand and street lighting	\$115.11	\$11.26	\$3.39	1.076	\$9.86	\$139.62	-\$2.12	-1.50%
Energex – Small business primary load control tariff	\$131.17	\$11.26	\$4.58	1.061	\$8.97	\$155.98	\$12.19	8.48%
Ergon – Large business primary and secondary load control tariffs	\$111.89	\$11.26	\$3.39	1.076	\$9.62	\$136.16	\$6.09	4.68%
Energex - Residential and small business - Time varying tariffs								
Time varying 1- Night	\$153.95	\$11.26	\$4.58	1.061	\$10.36	\$180.15	-\$5.89	-3.17%
Time varying 1 - Day	\$41.69	\$11.26	\$4.58	1.061	\$3.51	\$61.04	-\$23.45	-27.75%
Time varying 1- Evening Peak	\$253.43	\$11.26	\$4.58	1.061	\$16.43	\$285.70	\$1.26	0.44%
Time varying 2- Shoulder (Night)	\$141.43	\$11.26	\$4.58	1.061	\$9.59	\$166.86	NA	NA
Time varying 2 – Off-peak (Daylight)	\$36.01	\$11.26	\$4.58	1.061	\$3.16	\$55.01	NA	NA
Time varying 2- Peak (Evening)	\$235.80	\$11.26	\$4.58	1.061	\$15.35	\$266.99	NA	NA
Time varying 3- Shoulder (Night)	\$142.64	\$11.26	\$4.58	1.061	\$9.67	\$168.15	NA	NA
Time varying 3 – Off-peak (Daylight)	\$39.86	\$11.26	\$4.58	1.061	\$3.40	\$59.10	NA	NA
Time varying 3- Peak (Evening)	\$245.54	\$11.26	\$4.58	1.061	\$15.94	\$277.32	NA	NA

 Table 4.18
 Estimated TEC for 2025-26 (\$/MWh, nominal)

Note: The values exclude the fixed NEM Fees cost of \$0.27 per week per customer – which averages about \$1-2/MWh depending on the level of consumption.

Source: ACIL Allen analysis

4.7 Estimation of rooftop PV feed-in tariff


The QCA has also engaged ACIL Allen to provide advice on the approach to estimate the WEC component of the solar rooftop PV feed-in tariff (FiT) for customers in regional Queensland. This section summarises ACIL Allen's methodology and results.


Methodology for estimating the WEC component rooftop PV solar FiT

Determinations in previous years have estimated the solar feed-in-tariff (FiT) based on the wholesale energy cost used to set notified prices. This approach was taken because it was not possible to separate out solar PV exports from the NSLP or interval meter data.

However, AEMO now provides data which allows for the separation of solar PV exports from small customer imports for those small customers on interval meters. The NSLP continues to include the carve out of rooftop PV exports.

Figure 4.15 shows the average time of day demand of the Energex NSLP and Energex small customer interval meter for 2023-24. When including the carve out of rooftop PV exports, the demand profile of small customers on interval meters is peakier than the NSLP, but conversely when the PV export carve out is excluded, the interval meter demand profile is less peaky than the NSLP.

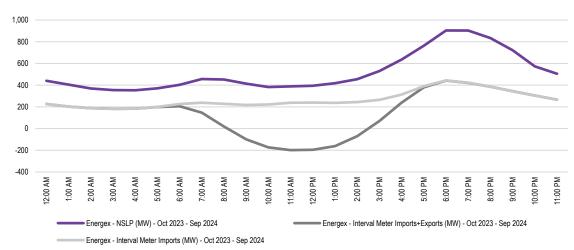



Source: ACIL Allen analysis of AEMO data

Our recommended approach to estimate the wholesale component of the FiT for the 2025-26 determination is as follows, and reflects a combination of the NSLP WEC, and the projected value of rooftop PV exports for interval meter customers:

- Step 1: Calculate the 95th percentile WEC for the Energex NSLP using the same methodology and inputs as adopted for the determination. This represents the avoided cost of rooftop PV exports for customers on the NSLP (analogous to what has been calculated in previous determinations when estimating the FiT).
- Step 2: Calculate the WEC for the combined Energex NSLP and small interval meter demand data <u>including</u> the PV export carve out using the same methodology and inputs as adopted for the determination.

- Step 3: Calculate the WEC for the combined Energex NSLP and small interval meter demand data <u>excluding</u> the PV export carve out using the same methodology and inputs as adopted for the determination.
- Step 4: From step 2 and 3 we have a series of 594 pairs of WECs. Calculate the difference in each pair of WECs from step 2 and 3 to estimate the value of the rooftop PV exports if it were included as part of the hedging strategy, using the following formula:
 - WEC_{PVExport} = (WEC_{Combined}ProfilewithoutExport *Energy_{Combined}ProfilewithoutExport WEC_{Combined}ProfilewithExport *Energy_{Combined}ProfilewithExport)/(Energy_{Combined}ProfilewithoutExport - Energy_{Combined}ProfilewithExport)
- Step 5: Take the 5th percentile of the WECs from Step 4. We recommend taking the 5th percentile as this represents value of PV exports for which there is a 95 per cent probability of exceedance (analogous to taking the 95th percentile WEC when estimating the wholesale cost of consumption from the grid).
- Step 6: The two WECs from Step 1 and Step 5 need to be combined into a single value by accounting for the relative volume of exports associated with the two profiles. The relative volume of rooftop PV exports is taken as the difference between the minimum and maximum of the average time of day profile for the NSLP and the combined profile data (including the PV export carve out). Then using these two values as a proxy for the relative size of the PV export carve out for each profile as the weighting, a weighted average WEC is calculated this is the final estimate of the WEC component of the FiT. And assumes the proportion of PV production that customers with PV are exporting to the grid is the same regardless of meter type.

Estimation of costs

The WEC for the Energex NSLP is \$155.47/MWh.

The WEC for rooftop PV exports from the interval meter data is \$16.29/MWh. This is much lower than the Energex NSLP WEC since it is an estimate of the value of rooftop PV exports.

The proxy rooftop PV export carve out is 551 MW and 641 MW for the Energy NSLP and Energex small interval meter data respectively. From this we estimate that the NSLP accounts for 46 per cent (551/(551+641)) of the total rooftop PV export carve out, and the interval meter data accounts for 54 per cent.

Therefore, the final estimate of the wholesale component of the FiT is \$80.31/MWh.

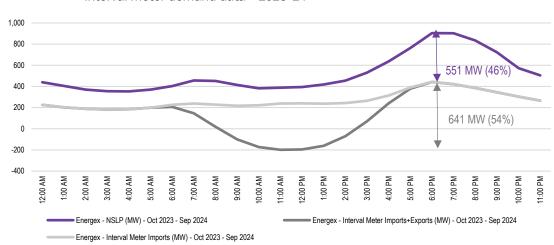


Figure 4.16 Average time of day demand (MW) of the Energex NSLP and Energex small interval meter demand data – 2023-24

Source: ACIL Allen analysis of AEMO data

Melbourne

Suite 4, Level 19, North Tower 80 Collins Street Melbourne VIC 3000 Australia +61 3 8650 6000

Canberra

Level 6, 54 Marcus Clarke Street Canberra ACT 2601 Australia +61 2 6103 8200

ACIL Allen Pty Ltd ABN 68 102 652 148

acilallen.com.au

Sydney Suite 603, Level 6 309 Kent Street Sydney NSW 2000 Australia +61 2 8272 5100

Perth Level 12, 28 The Esplanade Perth WA 6000 Australia +61 8 9449 9600

Brisbane

Level 15, 127 Creek Street Brisbane QLD 4000 Australia +61 7 3009 8700

Adelaide

167 Flinders Street Adelaide SA 5000 Australia +61 8 8122 4965